
VOR/DME RLY	APP CRS	Rwy Ldg	7000
114.8	157°	TDZE	4202
Chan 95		Apt Elev	4252

VOR RWY 16
WORLAND MUNI (WRL)


When local altimeter setting not received, use Greybull altimeter setting: increase all MDAs 140 feet; all Cats, and Circling Cat C/D visibilities ½ SM. Helicopter visibility reduction below ¾ SM NA. VDP NA with Greybull altimeter setting.

MISSED APPROACH: Climbing right turn to 7000 in RLY VOR/DME holding pattern.

ASOS	SALT LAKE CENTER	UNICOM
135.475	133.25 285.6	123.05 (CTAF) L

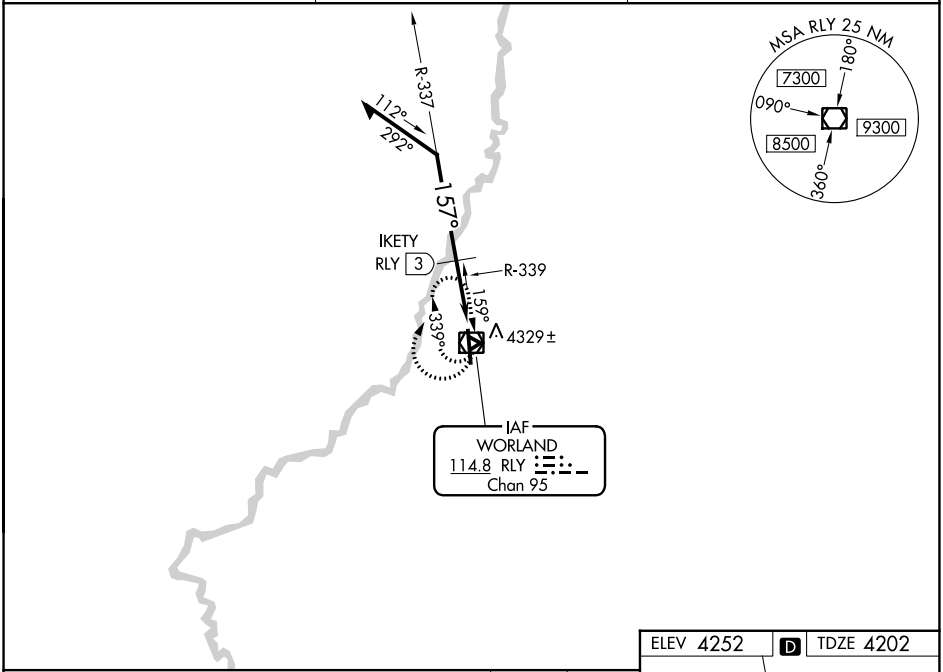

VGSI and descent angle not coincident (VGSI Angle 3.00/TCH 41).

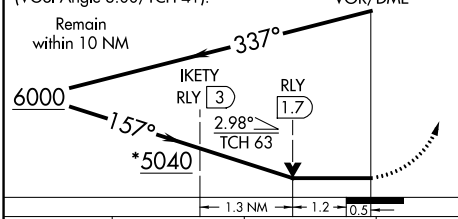


7000	RLY

*5180 when using Greybull altimeter setting.

CATEGORY	A	B	C	D
S-16	5040-1 838 (800-1)	5040-1¼ 838 (800-1¼)	5040-2½ 838 (800-2½)	
CIRCLING	5040-1 788 (800-1)	5040-1¼ 788 (800-1¼)	5040-2½ 788 (800-2½)	
IKETY FIX MINIMUMS				
S-16	4600-1 398 (400-1)		4600-1¼ 398 (400-1¼)	
CIRCLING	4920-1 668 (700-1)		4920-1¾ 668 (700-1¾)	5020-2½ 768 (800-2½)

ELEV 4252 D TDZE 4202

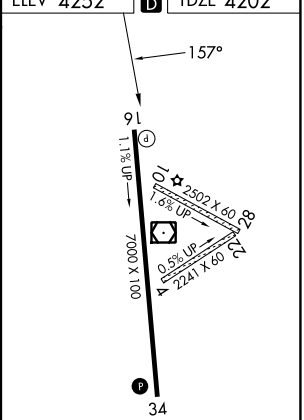

REIL Rwys 16 and 34 L
MIRL Rwy 16-34 L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026