
WAAS	APP CRS	Rwy Ldg	5006
CH 87007	326°	TDZE	2193
W33A		Apt Elev	2193

RNAV (GPS) RWY 33
ONTARIO MUNI (ONO)


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. Baro-VNAV and VDP NA when using Caldwell altimeter setting. When local altimeter setting not received, use Caldwell altimeter setting and increase all DA to 2541 feet and increase LPV and LNAV/VNAV visibility ⅜ SM all Cats; increase all MDA 100 feet and increase LNAV Cat C and D ⅜ SM and Circling Cat C visibility ½ SM. Circling Rwy 15 NA at night. Rwy 33 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 9000 direct ZEMTI and on track 327° to HOVEL and hold, continue climb-in-hold 9000.

ASOS	SALT LAKE CENTER	UNICOM
135.275	128.05 306.95	122.8 (CTAF) L

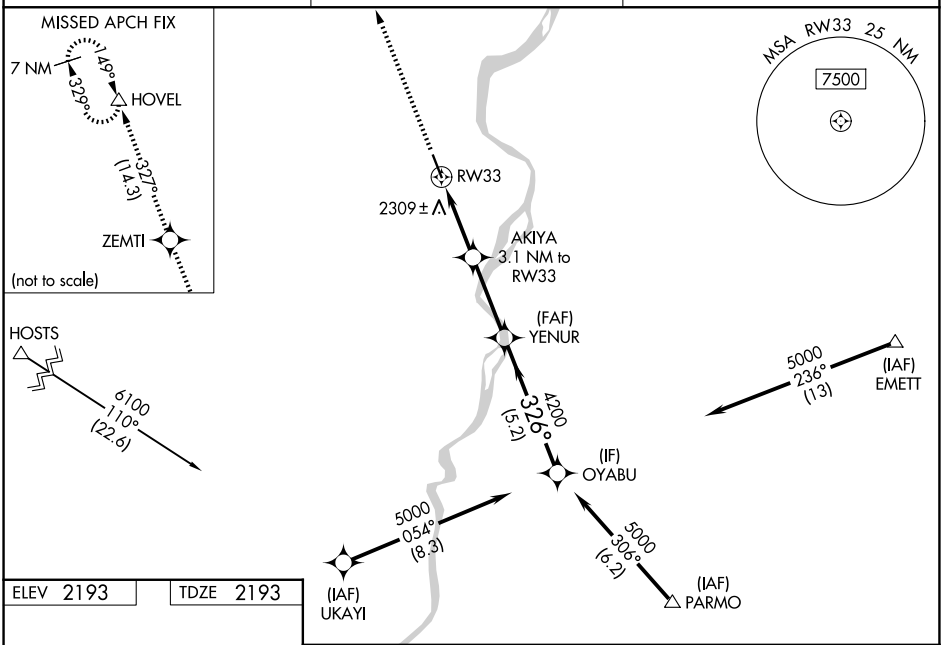

ELEV 2193 TDZE 2193

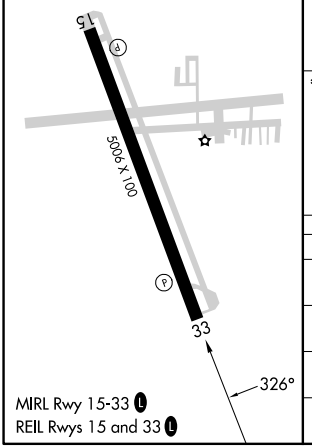

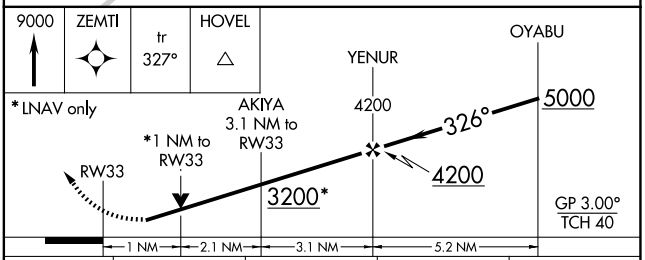

CATEGORY	A	B	C	D
LPV DA	2443-⅞ 250 (300-⅞)			
LNAV/VNAV DA	2443-⅞ 250 (300-⅞)			
LNAV MDA	2560-1 367 (400-1)			
CIRCLING	2760-1 567 (600-1)	2800-1 607 (700-1)	3120-2¾ 927 (1000-2¾)	3240-3 1047 (1100-3)

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026