RNAV (GPS) RWY 22


AVENGER FLD (SWW)

WAAS	APP CRS	Rwy Ldg	5658
CH 49125	215°	TDZE	2355
W22A		Apt Elev	2380


When VGSI inop, Circling Rwy 17 and 22 NA at night. Baro-VNAV NA when using Snyder altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 29°C (84°F). When VGSI inop, Straight in/Circling Rwy 22 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Snyder altimeter setting and increase LPV and LNAV/VNAV DA to 2677 feet, increase all MDAs 80 feet; increase LPV and LNAV/VNAV visibility all Cats ⅛ SM, LNAV visibility Cats C and D and Circling Cat C and D visibility ¼ SM.

MISSED APPROACH: Climb to 4400 direct OKWOR and hold.


AWOS-3	ABILENE APP CON	UNICOM
119.025	127.2 282.3	122.8 (CTAF)

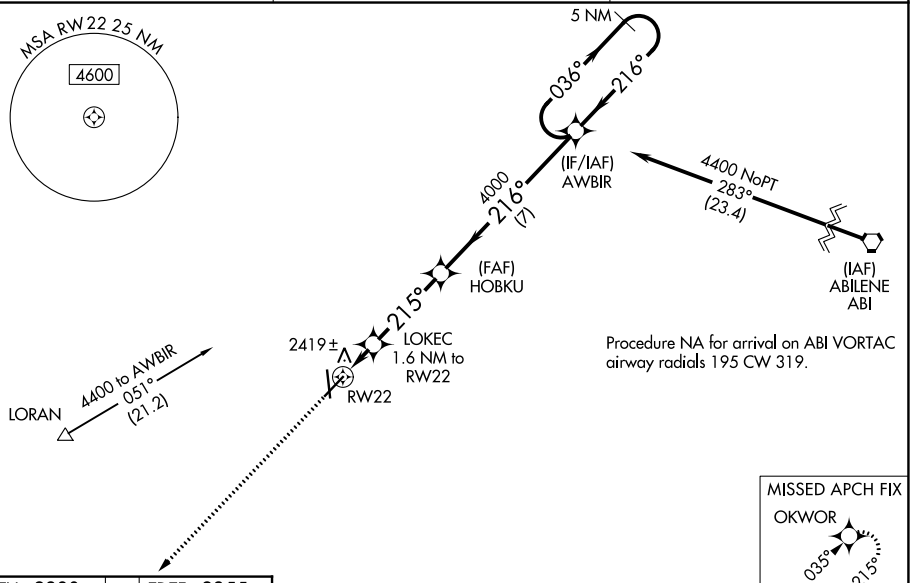

ELEV 2380 TDZE 2355



REIL Rwys 17-35
MIRL Rwys 4-22 and 17-35

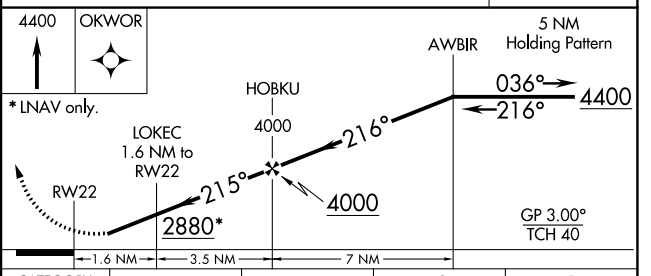

CATEGORY	A	B	C	D
LPV DA	2605-1	250 (300-1)		
LNAV/VNAV DA	2605-1	250 (300-1)		
LNAV MDA	2680-1	325 (300-1)		
CIRCLING	2880-1	500 (500-1)	3080-2 700 (700-2)	3080-2¼ 700 (700-2¼)

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026