RNAV (GPS) RWY 35

AVENGER FLD (SWW)


WAAS CH 78225 W35A	APP CRS 346°	Rwy Ldg 5840 TDZE 2369 Apt Elev 2380

RNP APCH - GPS.

When VGSI inop, Circling Rwy 17 and 22 NA at night. When VGSI inop, Straight-In/Circling Rwy 35 procedure NA at night. Baro-VNAV NA when using SNK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 35 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use SNK altimeter setting and increase LPV DA to 2691 feet, LNAV/VNAV DA to 2799 feet, and all MDAs 80 feet; increase LPV and LNAV/VNAV visibility all Cats ¼ SM, LNAV visibility Cats C and D ⅛ SM, and Circling Cat C and D visibility ¼ SM.

MISSED APPROACH: Climb to 4400 direct TORYO and hold.


AWOS-3	ABILENE APP CON	UNICOM
119.025	127.2 282.3	122.8 (CTAF)

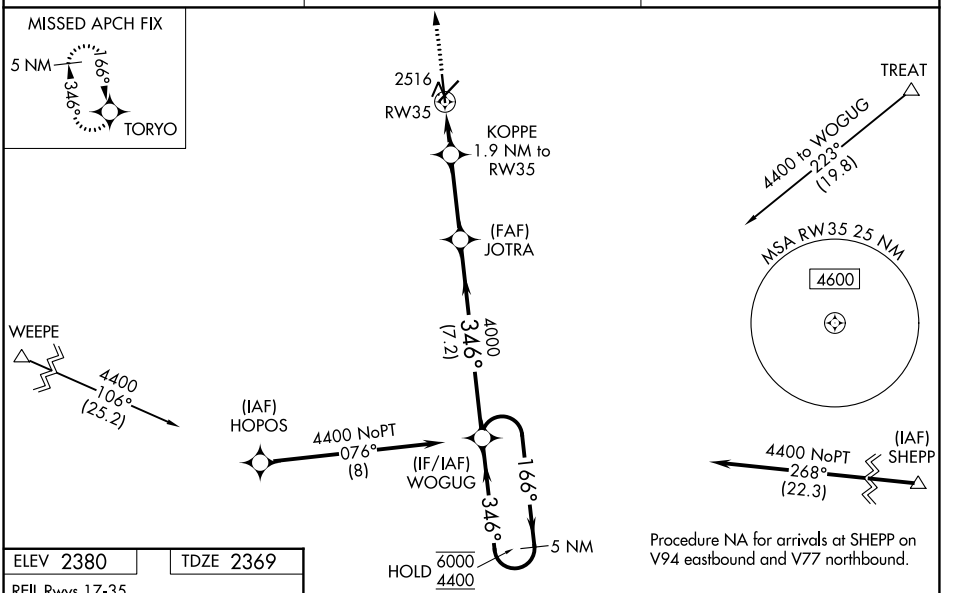


ELEV 2380 TDZE 2369

REIL Rwys 17-35

MIRL Rwys 4-22 and 17-35

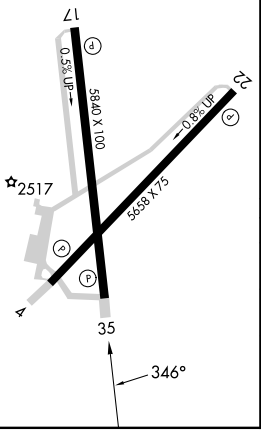

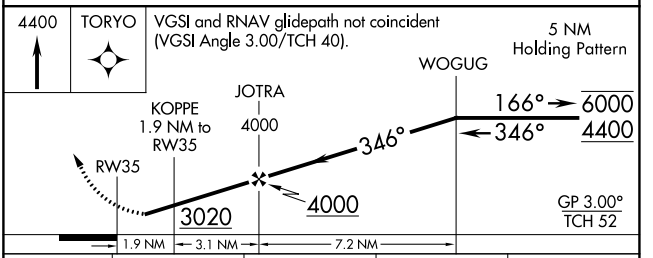

CATEGORY	A	B	C	D
LPV DA	2619-¾ 250 (300-¾)			
LNAV/VNAV DA	2727-1 358 (400-1)			
LNAV MDA	2820-1 451 (500-1)		2820-1⅜ 451 (500-1⅜)	
CIRCLING	2880-1 500 (500-1)		3080-2 700 (700-2)	3080-2¼ 700 (700-2¼)

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026