RNAV (GPS) RWY 4


AVENGER FLD (SWW)


WAAS	APP CRS	Rwy Ldg	5658
CH 72925	035°	TDZE	2380
W04A		Apt Elev	2380

Baro-VNAV NA when using Snyder altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 29°C (84°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Snyder altimeter setting and increase LPV DA to 2702 feet and LNAV/VNAV DA to 2799 feet, and all MDAs 80 feet; increase LPV visibility all Cats ⅛ SM, LNAV/VNAV visibility all Cats ¼ SM, LNAV visibility Cats C/D ⅛ SM, and Circling Cats C/D visibility ¼ SM. When VGSI inop, Straight-in/Circling Rwy 4 procedure NA at night. When VGSI inop, Circling Rwy 17 and 22 NA at night.


MISSED APPROACH: Climb to 4400 direct AWBIR and hold.

AWOS-3	ABILENE APP CON	UNICOM
119.025	127.2 282.3	122.8 (CTAF)

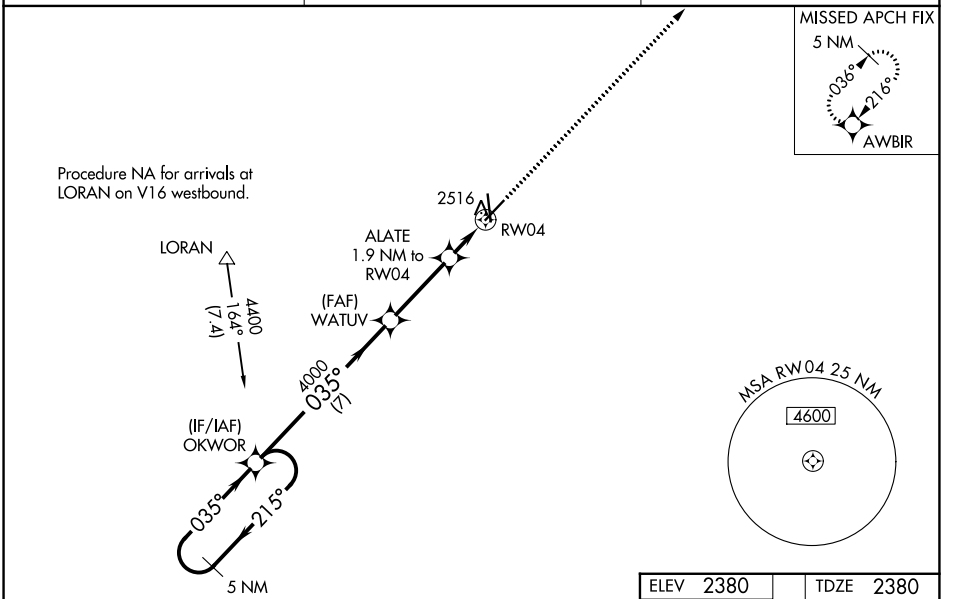

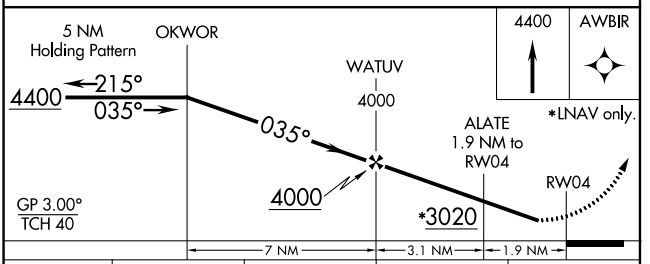

CATEGORY	A	B	C	D
LPV DA	2630-1 250 (300-1)			
LNAV/VNAV DA	2727-1⅛ 347 (400-1⅛)			
LNAV MDA	2820-1 440 (500-1)		2820-1¼ 440 (500-1¼)	
CIRCLING	2880-1 500 (500-1)		3080-2 700 (700-2)	3080-2¼ 700 (700-2¼)

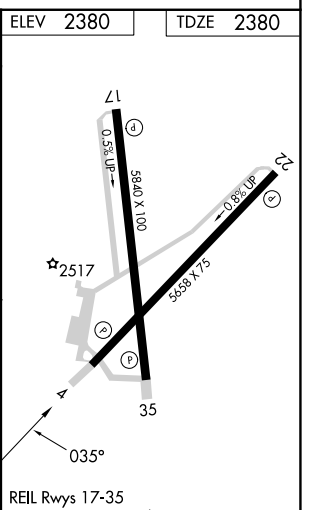

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026