RNAV (GPS) RWY 28

LAKE CITY GATEWAY (LCQ)


WAAS CH 82008 W28A	APP CRS 280°	Rwy Ldg 8003 TDZE 196 Apt Elev 201

RNP APCH-GPS.


Baro-VNAV and VDP NA when using Gainesville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Gainesville altimeter setting: Increase LPV DA to 624 feet and all visibility ¼ SM; LNAV/VNAV DA to 640 feet and all visibility ⅜ SM; increase all MDAs 100 feet and LNAV visibility Cat C and D ¼ SM and Circling visibility Cat C ½ SM and Circling Cat D ¼ SM. Circling Rwy 10 NA at night. Rwy 13 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 2000 direct JITUX and hold.

AWOS-3	JACKSONVILLE CENTER	LAKE CITY TOWER ★	GND CON	UNICOM
120.675	125.375 254.325	119.2 (CTAF) L 314.6	121.9	122.95

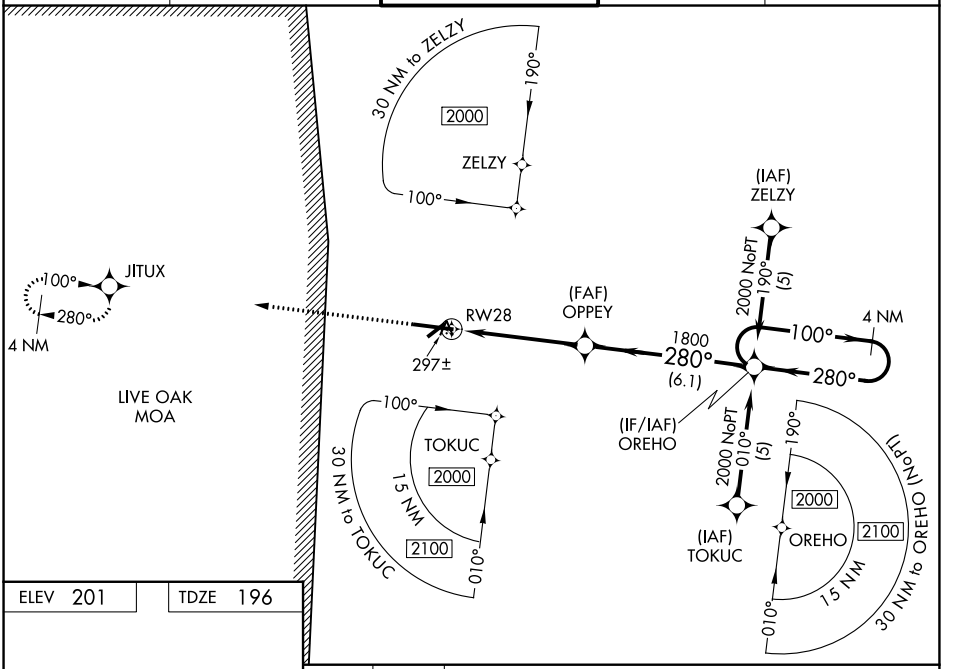

ELEV 201 TDZE 196



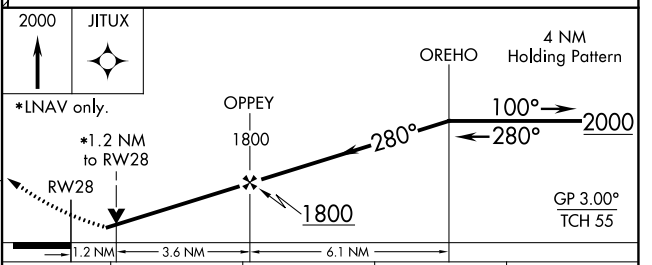

CATEGORY	A	B	C	D
LPV DA	540-1	344 (400-1)		
LNAV/VNAV DA	556-1	360 (400-1)		
LNAV MDA	640-1	444 (500-1)	640-1⅜	444 (500-1⅜)
CIRCLING	760-1	559 (600-1)	780-1½ 579 (600-1½)	960-2½ 759 (600-2½)

REIL Rwys 10 and 28 L

MIRL Rwys 5-23 and 10-28 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026