WAAS	APP CRS	Rwy Ldg	9400
CH 86530	358°	TDZE	36
W36B		Apt Elev	36

RNAV (GPS) Y RWY 36L

VALLEY INTL (HRL)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. Baro-VNAV and VDP NA when using Port Isabel altimeter setting. When local altimeter setting not received, use Port Isabel altimeter setting and increase LPV DA to 278 feet; increase LNAV/VNAV DA to 447 feet and all visibilities ⅛ SM. Increase all MDAs 60 feet, and LNAV visibility Cat C and D ⅛ SM; and Circling visibility Cats C and D ¼ SM.

MALSR

MISSED APPROACH: Climb to 2000 direct ZIPIV and hold.


ATIS	VALLEY APP CON	HARLINGEN TOWER ★	GND CON	UNICOM
124.85	120.7 279.5	119.3(CTAF) L 317.6	121.7	122.95


MISSED APCH FIX



ELEV 36 D TDZE 36

MIRL Rwy 18L-36R
REIL Rwys 13 and 18L
HIRL Rwys 13-31 and 18R-36L

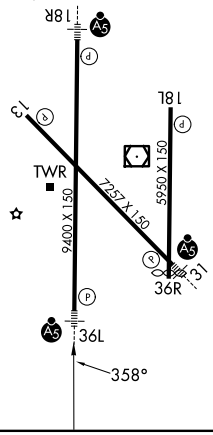

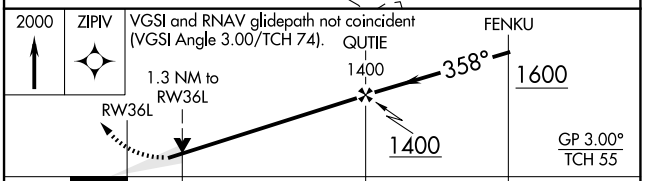

CATEGORY	A	B	C	D
LPV DA	236-¾		200 (200-¾)	
LNAV/VNAV DA	405-1		369 (400-1)	
LNAV MDA	500-1 464 (500-1)		500-1⅜ 464 (500-1⅜)	
CIRCLING	500-1 464 (500-1)	560-1 524 (600-1)	600-1½ 564 (600-1½)	680-2 644 (700-2)

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026