VORTAC ELW	APP CRS	Rwy Ldg 6002
108.6	039°	TDZE 759
Chan 23		Apt Elev 782

VOR RWY 5


ANDERSON RGNL (AND)

T A Rwy 17, 35 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use CEU altimeter setting and increase all MDAs 60 feet and S-5 visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM. VDP NA when using CEU altimeter setting. Circling Rwy 17, 35 NA at night.


MALSR

MISSED APPROACH: Climb to 1600 then climbing left turn to 2500 direct ELW VORTAC and hold.


ASOS	GREER APP CON ★	CTAF
120.675	118.8 270.275	123.6 L

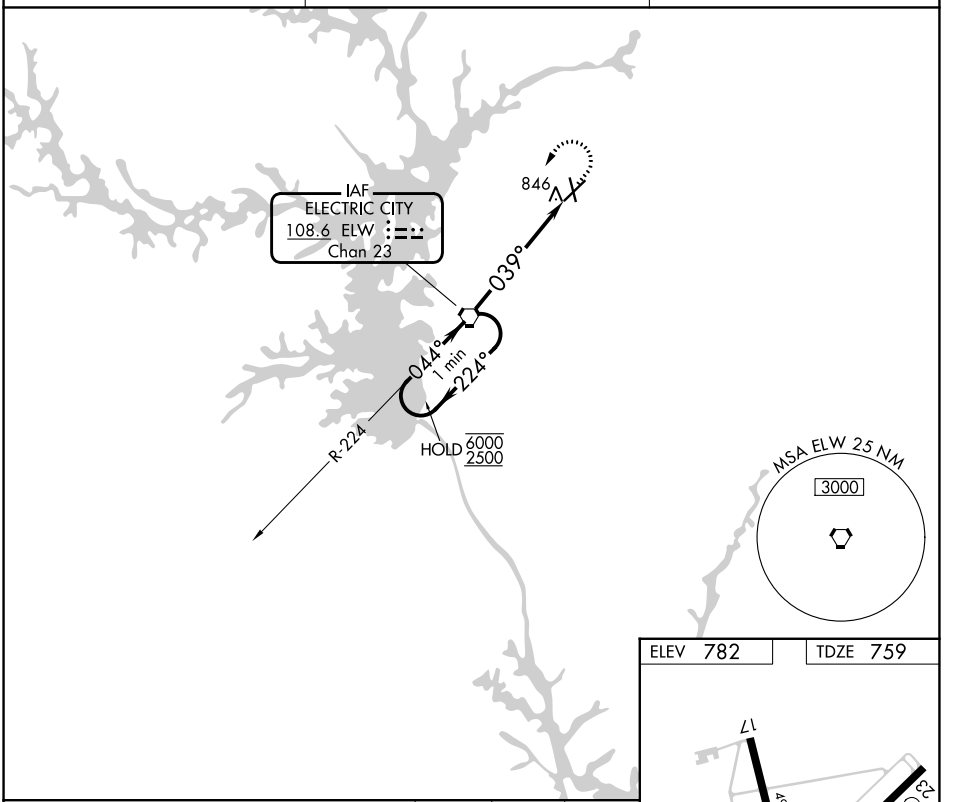

ELEV 782 TDZE 759

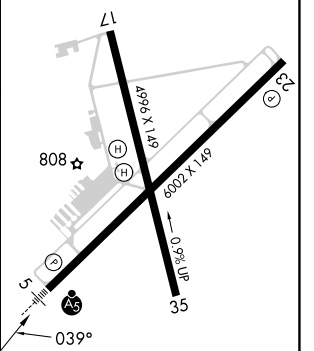

HIRL Rwy 5-23 L

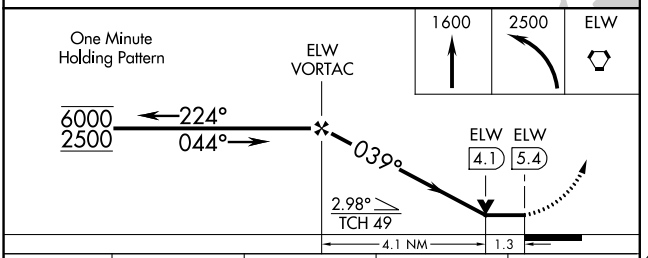

CATEGORY	A	B	C	D
S-5	1200-½	441 (500-½)	1200-⅞	441 (500-⅞)
CIRCLING	1260-1 478 (500-1)	1320-1 538 (600-1)	1440-1¾ 658 (700-1¾)	1500-2¼ 718 (800-2¼)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026