LOC I-UIN	APP CRS	Rwy Ldg	7098
110.1	038°	TDZE	763
		Apt Elev	768

ILS or LOC RWY 4

QUINCY RGNL-BALDWIN FLD (UIN)


ADF required.
RADAR required for procedure entry at RAYOK.


T A NA DME from UIN TACAN. DME use requires simultaneous reception of I-UIN and UIN TACAN. When local altimeter setting not received, use Pittsfield altimeter setting and increase S-ILS 04 DA to 1033 feet; increase all MDAs 80 feet and S-LOC 04 visibility Cat C/D ⅜ SM. For inop ALS when local altimeter not received, increase S-ILS 4 all Cats visibility to ⅞ SM and S-LOC 4 Cat C and D visibility to 1 ⅜ SM.

MALSR A5


MISSED APPROACH: Climb to 1800 then climbing right turn to 2300 direct QUINCY LOM and hold.

ASOS	KANSAS CITY CENTER	UNICOM
121.425	126.225 317.775	123.0 (CTAF) L

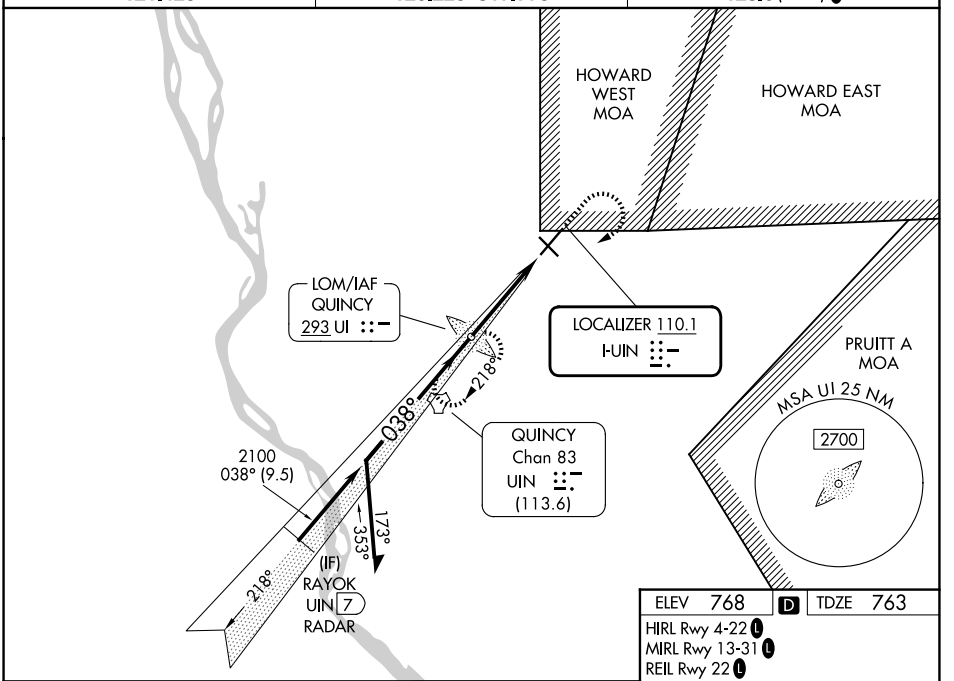

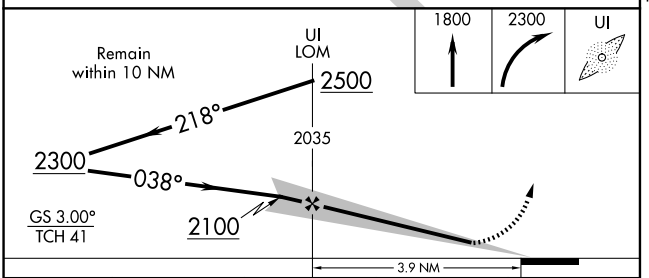

ELEV 768 D TDZE 763
HIRL Rwy 4-22 L
MIRL Rwy 13-31 L
REIL Rwy 22 L



CATEGORY	A	B	C	D
S-ILS 4	963-½ 200 (200-½)			
S-LOC 4	1160-½ 397 (400-½)		1160-⅝ 397 (400-⅝)	
CIRCLING	1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1½ 472 (500-1½)	1320-2 552 (600-2)

FAF to MAP 3.9 NM

Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026