RNAV (GPS) RWY 29

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

WAAS CH 45703 W29A	APP CRS 287°	Rwy Ldg 5155 TDZE 41 Apt Elev 41


RNP APCH - GPS.


Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Circling Rwy 11, 4R, 4L, and 22R NA at night. Baro-VNAV and VDP NA when using ARA altimeter setting. When local altimeter setting not received, use ARA altimeter setting and increase LPV DA to 320 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 320 feet and visibilities ⅛ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM.


MISSED APPROACH: Climb to 2800 direct SUVDE and on track 273° to RAYNE and hold.

ATIS	LAFAYETTE APP CON★	LAFAYETTE TOWER★	GND CON	UNICOM
134.05	121.1 363.0	118.5 (CTAF) L 257.8	121.8	122.95

MISSED APCH FIX



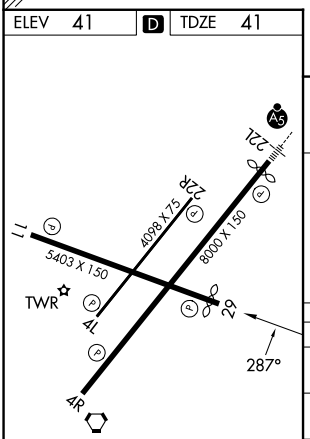

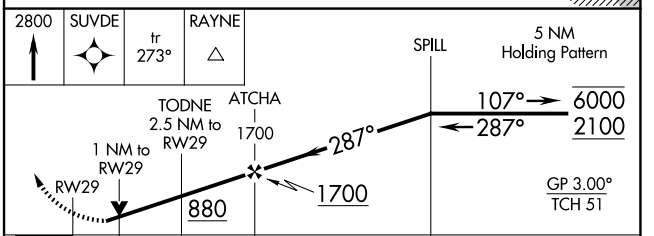

CATEGORY	A	B	C	D
LPV DA	291-¾		250 (300-¾)	
LNAV/VNAV DA	291-¾		250 (300-¾)	
LNAV MDA	400-1		359 (400-1)	
CIRCLING	500-1 459 (500-1)	580-1 539 (600-1)	700-1¾ 659 (700-1¾)	700-2 659 (700-2)

REIL Rwys 4L, 4R, 11, 22R and 29
MIRL Rwy 11-29 and 4L-22R
HIRL Rwy 4R-22L

SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026