WAAS CH 77703 W09A	APP CRS 088°	Rwy Ldg 6347 TDZE 285 Apt Elev 291

RNAV (GPS) RWY 9

WILLIAM R FAIRCHILD INTL (CLM)


RNP APCH - GPS.


Baro-VNAV NA. Circling Rwy 13, 31 NA at night. Circling NA south of Rwy 9-27. VDP NA when using FHR altimeter setting. For inop ALS, increase LPV all Cats visibility to ⅞ SM, LNAV/VNAV all Cats visibility to 1⅝ SM, and LNAV Cat C/D visibility to 2 SM. When local altimeter setting not received, use FHR altimeter setting and increase LPV DA to 656 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 956 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat B/C/D ¼ SM, and Circling visibility Cat B/C/D ½ SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 5400 direct WATTR and hold, continue climb-in-hold to 5400.


ASOS	WHIDBEY APP CON	CLNC DEL	UNICOM
135.175	118.2 285.65	124.15	122.975 (CTAF) L

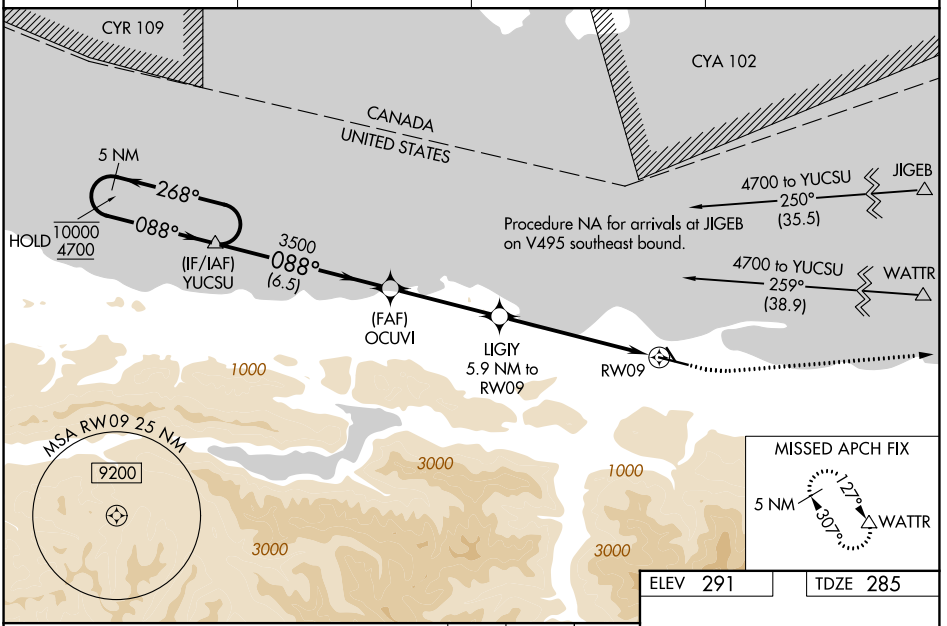

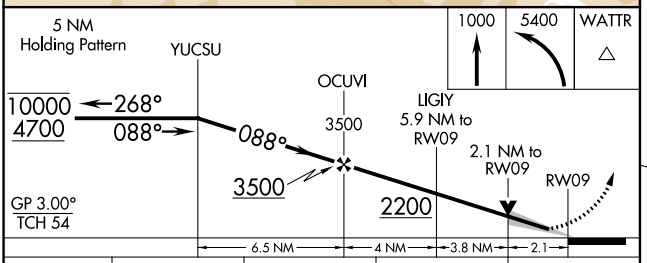

CATEGORY	A	B	C	D
LPV DA		560-½	275 (300-½)	
LNAV/VNAV DA		860-1¼	575 (600-1¼)	
LNAV MDA	1000-½	715 (800-½)	1000-1⅝	715 (800-1⅝)
CIRCLING	1000-1	709 (800-1)	1000-2 709 (800-2)	1000-2¼ 709 (800-2¼)

ELEV 291 TDZE 285



MIRL Rwy 9-27 L
REIL Rwy 27

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026