RNAV (GPS) X RWY 6

TETERBORO (TEB)

WAAS CH 65634 W06B	APP CRS 062°	Rwy Ldg 6014	TDZE 6	Apt Elev 8


RNP APCH - GPS.
RADAR required.


Circling NA for Cats B, C and D northwest of Rwys 6 and 19. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LPV all Cats visibility to 1⅜ SM, and LNAV/VNAV all Cats visibility to 1⅞ SM. When Circling to Rwy 24 at night, operational VGSI required, remain on or above the VGSI glidepath until threshold.


MALSR

MISSED APPROACH: Climb to 1000, then climbing left turn to 2000 direct TEBLE, cross TEBLE at or below 2000, then climb to 3000 on track 272° to UBUCK and hold.

D-ATIS	NEWARK APP CON	TETERBORO TOWER	GND CON
114.2 132.85	127.6 379.9	119.5	121.9

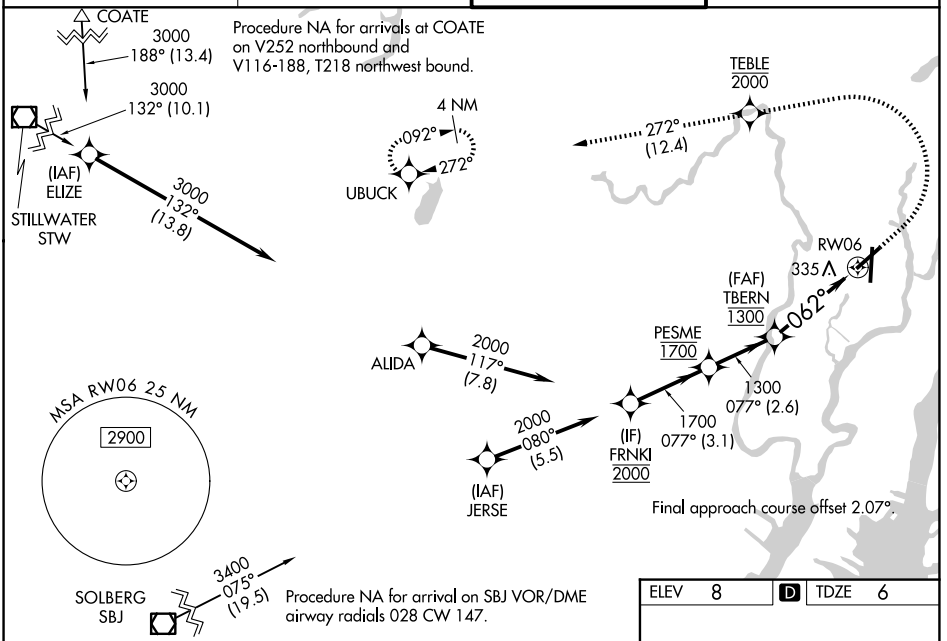

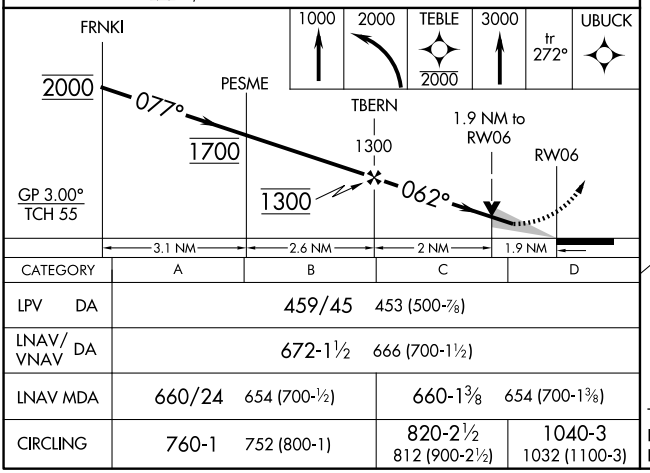



CATEGORY	A	B	C	D
LPV DA	459/45 453 (500-⅞)			
LNAV/VNAV DA	672-1½ 666 (700-1½)			
LNAV MDA	660/24 654 (700-½)		660-1⅜ 654 (700-1⅜)	
CIRCLING	760-1 752 (800-1)		820-2½ 812 (900-2½)	1040-3 1032 (1100-3)

TDZL/RCLS Rwys 6 and 19
HIRL Rwys 1-19 and 6-24
REIL Rwys 1, 6, 19 and 24

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026