WAAS	APP CRS	Rwy Ldg	6003
CH 42700	281°	TDZE	85
W28A		Apt Elev	85

RNAV (GPS) RWY 28


MILLVILLE MUNI (MIV)

RNP APCH-GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use ACY altimeter setting: increase LPV DA to 400 feet; increase LNAV/VNAV DA to 461 feet; increase all MDAs 60 feet and LNAV and Circling visibility Cat C 1/8 SM. Baro-VNAV and VDP NA when using ACY altimeter setting.

MISSED APPROACH: Climb to 2000 direct TIYDU and right turn on track 030° to RUPDE and right turn 077° track to VCN VOR/DME and hold.

ASOS	ATLANTIC CITY APP CON	UNICOM
119.6	124.6 327.125	123.0 (CTAF) L

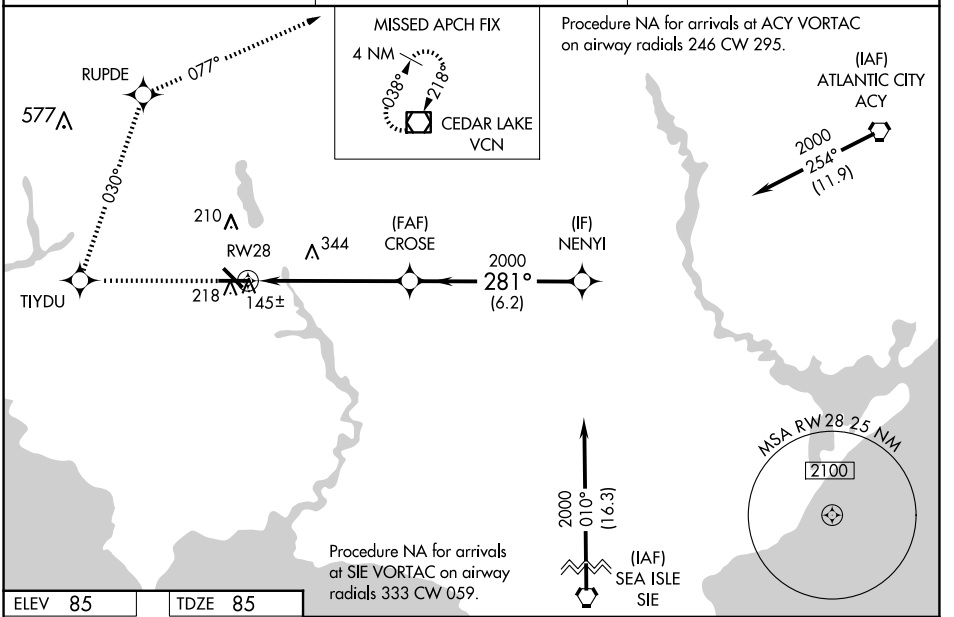


ELEV 85	TDZE 85



MIRL Rwys 10-28 and 14-32 L

2000	TIYDU	tr 030°	RUPDE	tr 077°	VCN

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/ TCH 29)

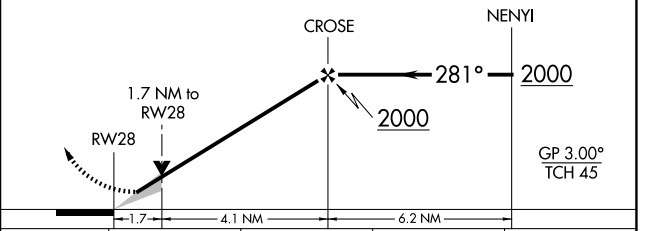

CATEGORY	A	B	C	D
LPV DA	344-1 259 (300-1)			
LNAV/VNAV DA	405-1 320 (400-1)			
LNAV MDA	640-1 555 (600-1)		640-1⅝ 555 (600-1⅝)	640-1¾ 555 (600-1¾)
CIRCLING	640-1 555 (600-1)		660-1⅝ 575 (600-1⅝)	660-2 575 (600-2)

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026