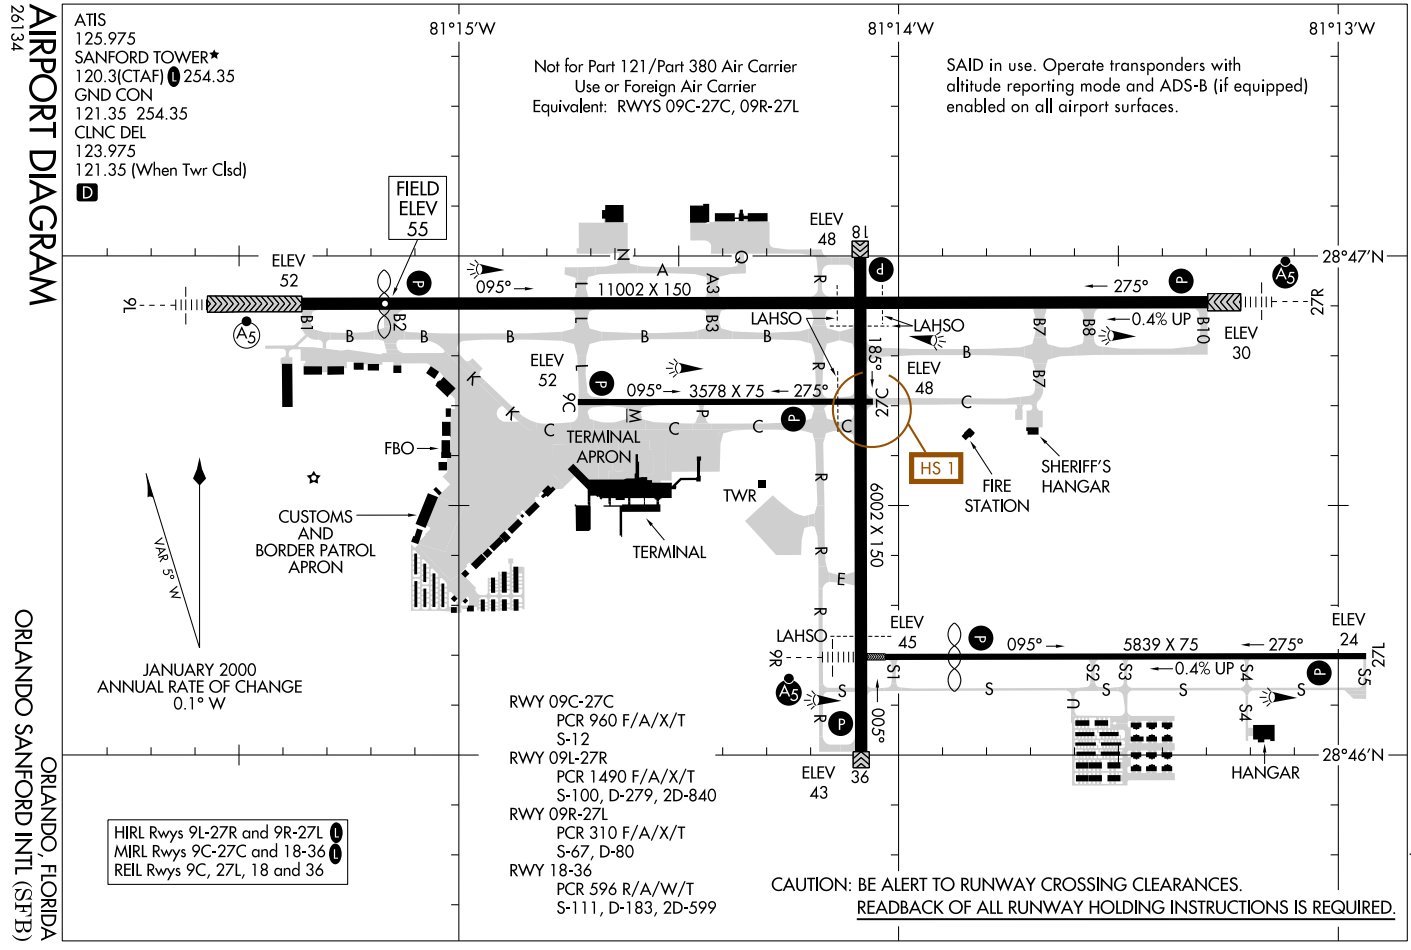

ATIS
125.975
SANFORD TOWER★
120.3(CTAF) L 254.35
GND CON
121.35 254.35
CLNC DEL
123.975
121.35 (When Twr Clsd)
D
81°15'W
81°14'W
81°13'W
28°47'N
28°46'N
Not for Part 121/Part 380 Air Carrier Use or Foreign Air Carrier Equivalent: RWYS 09C-27C, 09R-27L
SAID in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces.
FIELD ELEV 55
ELEV 52
ELEV 48
ELEV 30
ELEV 45
ELEV 24
ELEV 43
095°
275°
11002 X 150
3578 X 75
6002 X 150
5839 X 75
0.4% UP
LAHSO
HS 1
FIRE STATION
SHERIFF'S HANGAR
TERMINAL APRON
TERMINAL
TWR
FBO
CUSTOMS AND BORDER PATROL APRON
HANGAR
VAR 5° W
JANUARY 2000
ANNUAL RATE OF CHANGE
0.1° W
RWY 09C-27C
PCR 960 F/A/X/T
S-12
RWY 09L-27R
PCR 1490 F/A/X/T
S-100, D-279, 2D-840
RWY 09R-27L
PCR 310 F/A/X/T
S-67, D-80
RWY 18-36
PCR 596 R/A/W/T
S-111, D-183, 2D-599
HIRL Rwys 9L-27R and 9R-27L L
MIRL Rwys 9C-27C and 18-36 L
REIL Rwys 9C, 27L, 18 and 36
CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.