RNAV (GPS) RWY 8

LANCASTER (LNS)


WAAS	APP CRS	Rwy Ldg	6118
CH 77915	077°	TDZE	399
W08A		Apt Elev	403


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Harrisburg Intl altimeter setting and increase all DA 64 feet and all MDA 80 feet, increase LNAV/VNAV all Cats visibility ¼ mile, LNAV and Circling Cats C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Harrisburg Intl altimeter setting. Night landing: Rwy 13, 31 NA. For inoperative MALSR increase LNAV/VNAV all Cats visibility to 1¼ mile, and LNAV Cats C/D visibility to 1⅛ mile. For inoperative MALSR when using Harrisburg Intl altimeter setting, increase LPV all Cats visibility to ⅞ mile, LNAV/VNAV all Cats visibility to 1½ mile and LNAV Cats C/D visibility to 1⅜ mile.

MALSR


MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct KUPPS and hold.

ATIS	HARRISBURG APP CON	LANCASTER TOWER ★	GND CON	UNICOM
125.675	126.45 281.525	120.9 (CTAF) L 251.1	121.8	122.95

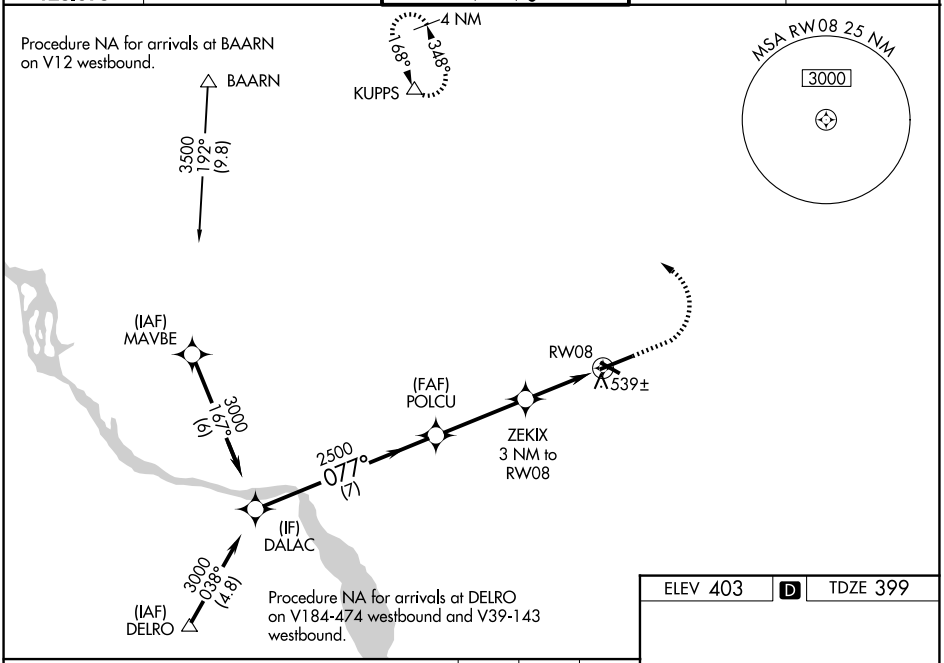

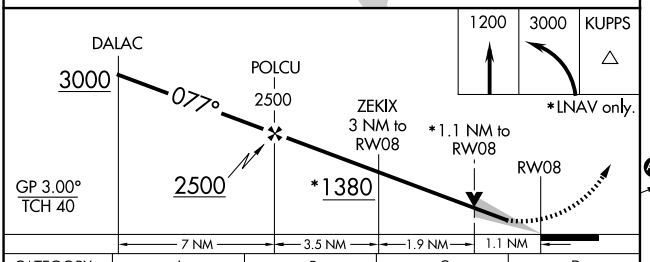

CATEGORY	A	B	C	D
LPV DA		599-½	200 (200-½)	
LNAV/VNAV DA		784-⅞	385 (400-⅞)	
LNAV MDA	800-½ 401 (400-½)		800-¾ 401 (400-¾)	
CIRCLING	940-1 537 (600-1)		960-1½ 557 (600-1½)	1060-2 657 (700-2)



REIL Rwy 31 L
HIRL Rwy 8-26 L
MIRL Rwy 13-31 L

NE-4, 29 OCT 2026 to 26 NOV 2026
NE-4, 29 OCT 2026 to 26 NOV 2026