RNAV (GPS) RWY 29

EASTERWOOD FLD (CLL)


WAAS CH 87022 W29A	APP CRS 286°	Rwy Ldg 5158 TDZE 314 Apt Elev 321

RNP APCH.


T A Baro-VNAV NA when using Caldwell altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. Rwy 29 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct ICESO and hold.


ATIS	HOUSTON APP CON	EASTERWOOD TOWER ★	GND CON	UNICOM
126.85	134.3 360.85	118.5 (CTAF) L 284.7	128.7 284.7	122.95

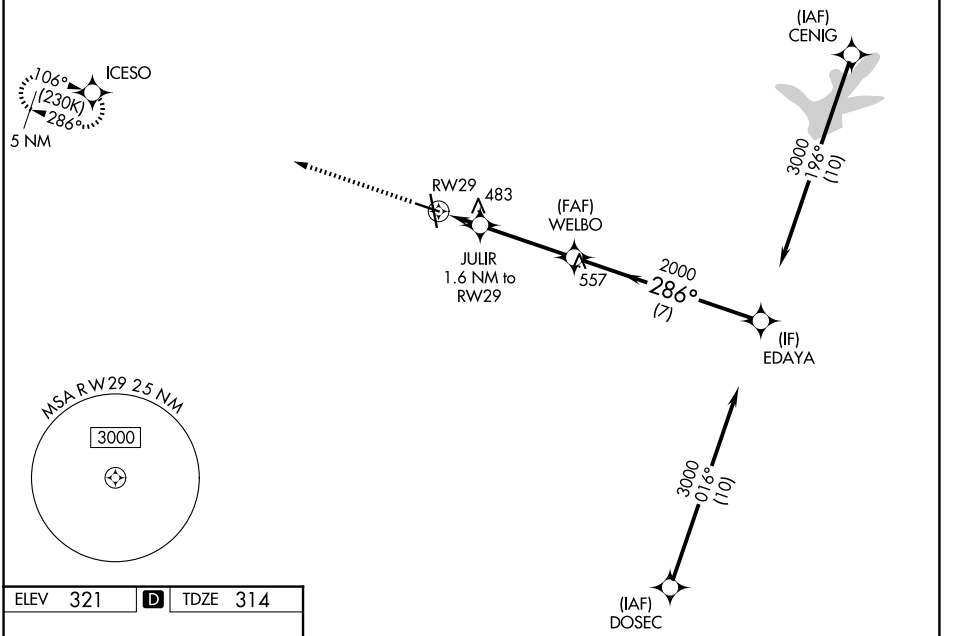

ELEV 321 D TDZE 314



REIL Rwy 29
MIRL Rwy 11-29 L
HIRL Rwy 17-35 L

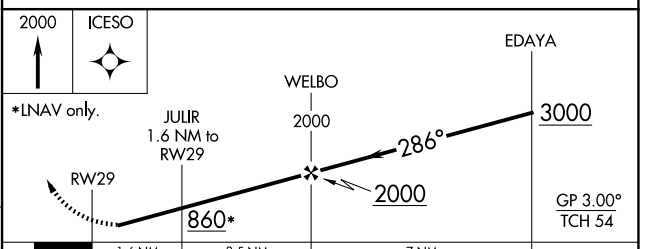

CATEGORY	A	B	C	D	E
LPV DA	564-¾ 250 (300-¾)				
LNAV/VNAV DA	762-1⅜ 448 (500-1⅜)				
LNAV MDA	740-1 426 (500-1)		740-1¼ 426 (500-1¼)		
CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2¾ 859 (900-2¾)	1180-3 859 (900-3)

SC-5, 29 OCT 2026 to 26 NOV 2026
SC-5, 29 OCT 2026 to 26 NOV 2026