# RNAV (RNP) Y RWY 23

MORRISTOWN MUNI (MMU)

| APP CRS | Rwy Ldg | 5998 |
|---|---|---|
| 229° | TDZE | 184 |
| | Apt Elev | 187 |


RNP AR APCH - GPS. Authorization required. From HOLEM: RF

When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, procedure NA Below -15°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to 1 SM and RNP 0.30 all Cats visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 2000 direct SUCSO then on track 250° to SBJ VOR/DME and hold.

| ATIS | NEWARK APP CON | MORRISTOWN TOWER ★ | GND CON |
|---|---|---|---|
| 124.25 | 127.6 379.9 | 118.1 (L) (CTAF) 353.9 | 134.2 |

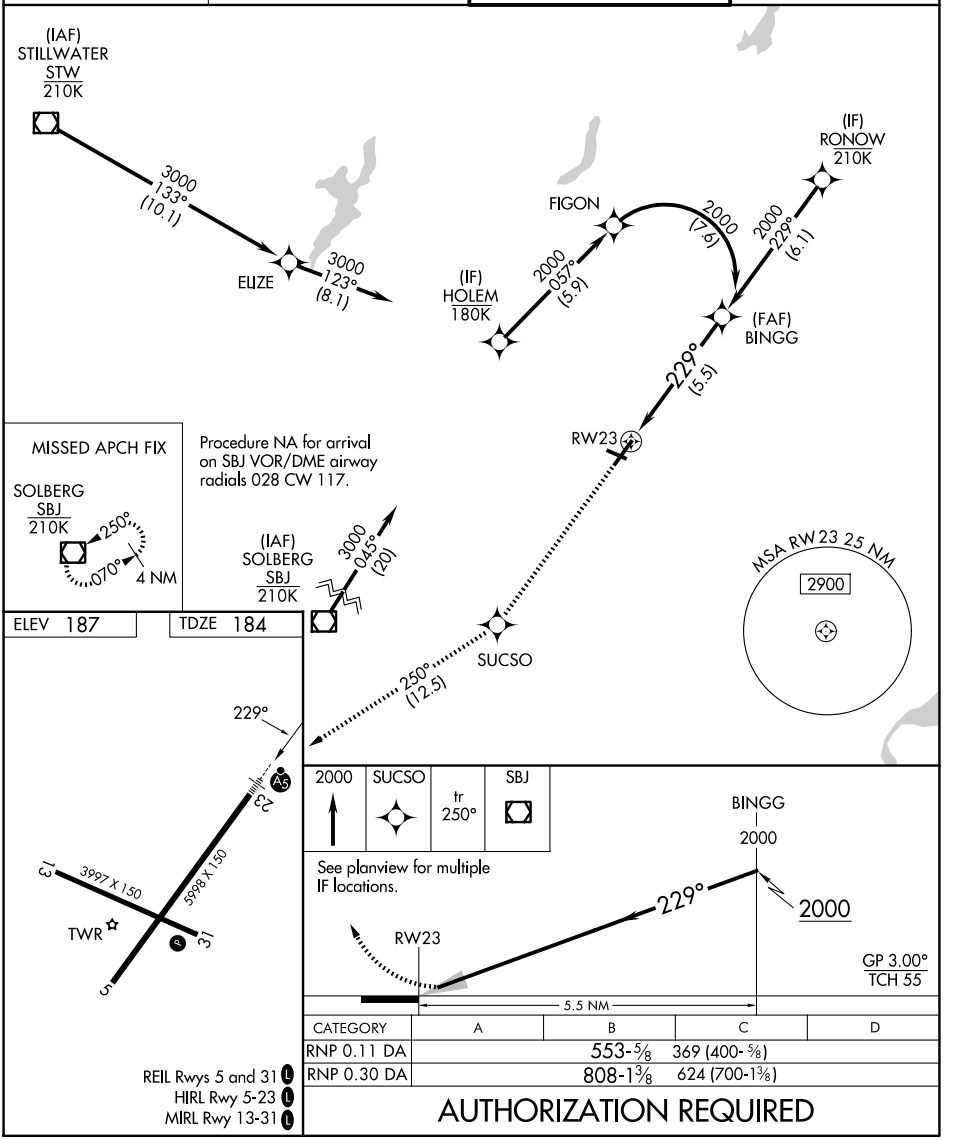


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.11 DA | | 553-⅝ | 369 (400-⅝) | |
| RNP 0.30 DA | | 808-1⅜ | 624 (700-1⅜) | |

REIL Rwys 5 and 31 (L)
HIRL Rwy 5-23 (L)
MIRL Rwy 13-31 (L)

## AUTHORIZATION REQUIRED



NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026