RNAV (GPS) X RWY 23

MORRISTOWN MUNI (MMU)

WAAS	APP CRS	Rwy Ldg	5998
CH 49147	229°	TDZE	184
W23B		Apt Elev	187


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling to Rwy 13, 31 NA at night. For inop ALS, increase LPV all Cats visibility to ⅞ and LNAV Cats C/D visibility to 1¾ SM.


MALSR

MISSED APPROACH: (Do not exceed 185K until BSPUR) Climb to 700 then climbing right turn to 3000 direct BSPUR and track 012° to EMRSN and hold.
* Missed approach requires minimum climb of 201 feet per NM to 1900.

ATIS	NEWARK APP CON	MORRISTOWN TOWER *	GND CON
124.25	127.6 379.9	118.1 L (CTAF) 353.9	134.2

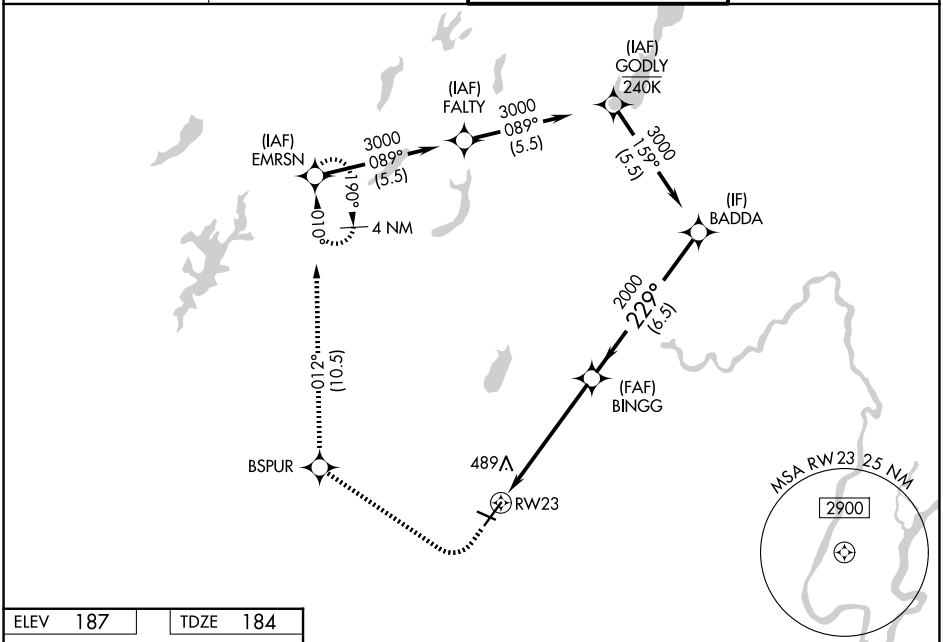


ELEV 187 TDZE 184



REIL Rwys 5 and 31 L
HIRL Rwy 5-23 L
MIRL 13-31 L

700	3000	BSPUR	tr 012°	EMRSN

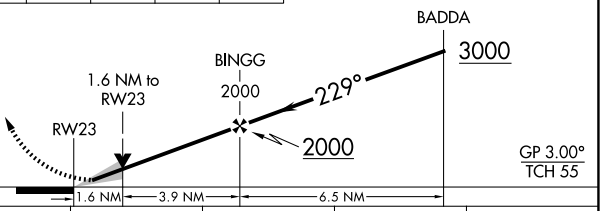

CATEGORY	A	B	C	D
LPV DA *	384-½		200 (200-½)	
LPV DA	436-½		252 (300-½)	
LNAV/VNAV DA	774-1¼		590 (600-1¼)	
LNAV MDA	760-½	576 (600-½)	760-1¼	576 (600-1¼)
CIRCLING	860-1 673 (700-1)	900-1 713 (800-1)	1000-2½ 813 (900-2½)	1240-3 1053 (1100-3)

NE-2, 29 OCT 2026 to 26 NOV 2026