ILS or LOC RWY 32

SOUTHERN WISCONSIN RGNL (JVL)

LOC/DME I-REE	APP CRS	Rwy Ldg	7302
111.35	316°	TDZE	806
Chan 50 (Y)		Apt Elev	808


DME required. RNP APCH - GPS.


Circling Rwy 18 NA at night. When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting and increase DA to 1075, increase all MDA 80 feet. Increase S-LOC 32 Cats C and D visibility ⅜ SM, and Circling Cats C/D ¼ SM. VDP NA when using Chicago/Rockford Intl altimeter setting. For inop ALS when using Chicago/Rockford Intl altimeter setting, increase S-ILS 32 visibility all Cats to ⅞ SM and S-LOC 32 visibility Cats C/D to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1700 then climbing left turn to 3100 direct TIRRO and hold.


ATIS	ROCKFORD APP CON	JANESVILLE TOWER★	GND CON	UNICOM
128.25	121.0 327.0	118.8 (CTAF) 225.4	121.65	122.95

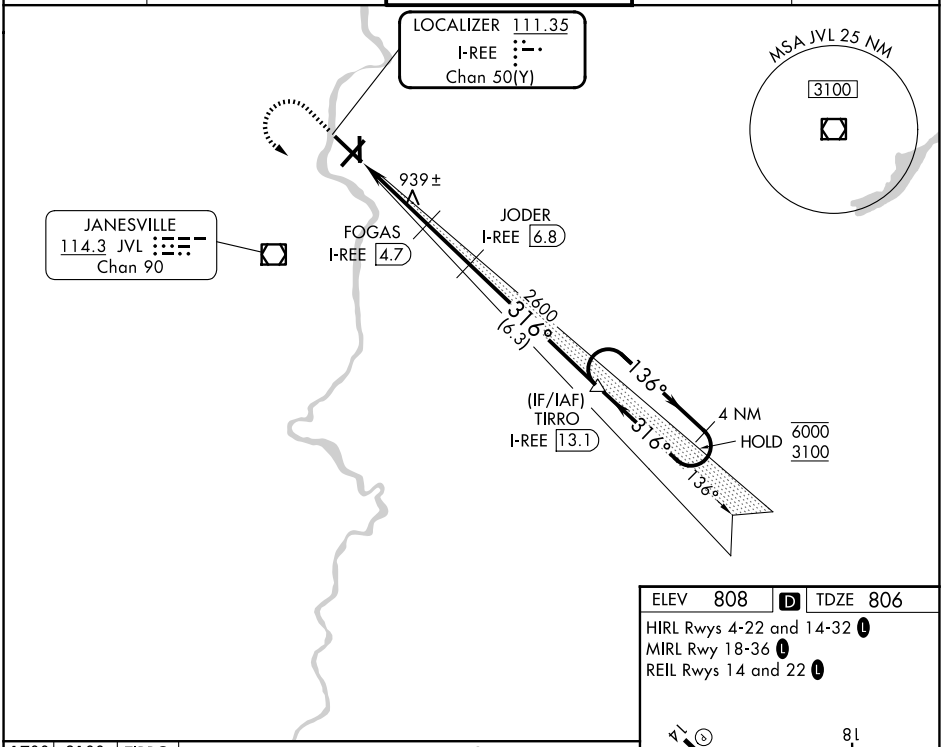

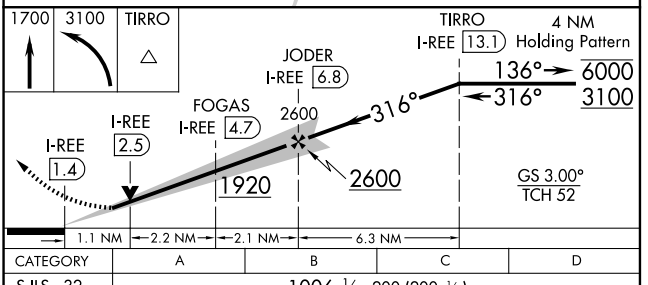

ELEV 808	D	TDZE 806

HIRL Rwys 4-22 and 14-32 (L)
MIRL Rwy 18-36 (L)
REIL Rwys 14 and 22 (L)



CATEGORY	A	B	C	D
S-ILS 32	1006-½ 200 (200-½)			
S-LOC 32	1200-½ 394 (400-½)		1200-⅝ 394 (400-⅝)	
CIRCLING	1260-1 452 (500-1)	1320-1 512 (600-1)	1420-1¾ 612 (700-1¾)	1460-2 652 (700-2)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026