RNAV (GPS) RWY 14

SOUTHERN WISCONSIN RGNL (JVL)


WAAS	APP CRS	Rwy Ldg	7302
CH 86617	135°	TDZE	803
W14A		Apt Elev	808


RNP APCH-GPS.


Circling Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. VDP NA when using Rockford altimeter setting. When local altimeter setting not received, use Rockford altimeter setting and increase LPV DA to 1072 feet, LNAV/VNAV DA to 1291 feet, and all MDAs 80 feet; increase LPV all Cats visibility ⅛ SM, LNAV/VNAV all Cats visibility ¼ SM, LNAV Cat C/D visibility ¼ SM, and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 3100 direct TIRRO and hold.

ATIS	ROCKFORD APP CON	JANESVILLE TOWER★	GND CON	UNICOM
128.25	121.0 327.0	118.8 (CTAF) 225.4	121.65	122.95

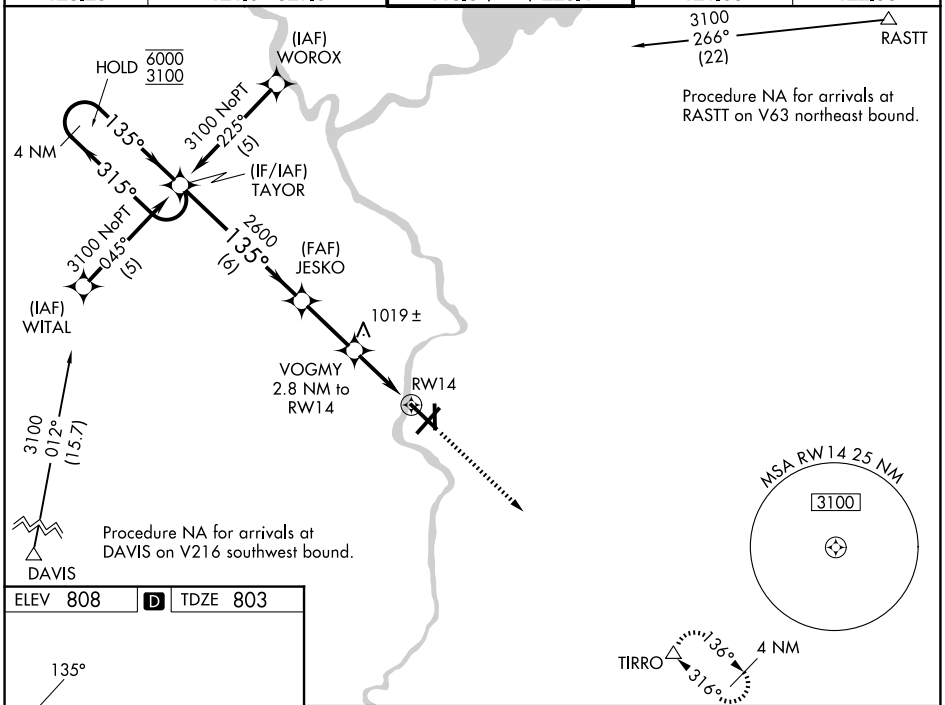

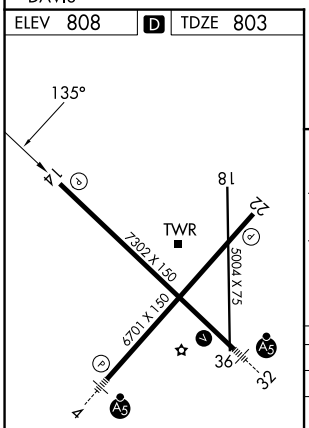

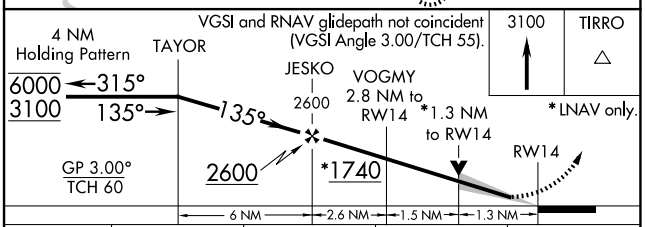

CATEGORY	A	B	C	D
LPV DA	1003-¾ 200 (200-¾)			
LNAV/VNAV DA	1222-1⅛ 419 (500-1⅛)			
LNAV MDA	1280-1 477 (500-1)		1280-1⅜ 477 (500-1⅜)	1280-1⅜ 477 (500-1⅜)
CIRCLING	1280-1 472 (500-1)	1320-1 512 (600-1)	1420-1¾ 612 (700-1¾)	1460-2 652 (700-2)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026