RNAV (GPS) RWY 4

SOUTHERN WISCONSIN RGNL (JVL)


WAAS	APP CRS	Rwy Ldg	6701
CH **82617**	**043°**	TDZE	**806**
W04A		Apt Elev	**808**


Circling to Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP NA with Rockford altimeter setting. When local altimeter setting not received, use Rockford altimeter setting and increase LPV DA to 1075 feet, LNAV/VNAV DA to 1314 feet and all MDAs 80 feet; increase LNAV Cat C and Circling Cats C/D visibility ¼ SM. For inop ALS, when using Rockford altimeter setting increase LPV all Cats visibility to ⅞ SM and LNAV/VNAV all Cats visibility to 1⅜ SM.

MALSR


MISSED APPROACH: Climb to 3100 direct OTLEE and hold.

ATIS	ROCKFORD APP CON	JANESVILLE TOWER★	GND CON	UNICOM
128.25	**121.0 327.0**	**118.8** (CTAF) **225.4**	**121.65**	**122.95**

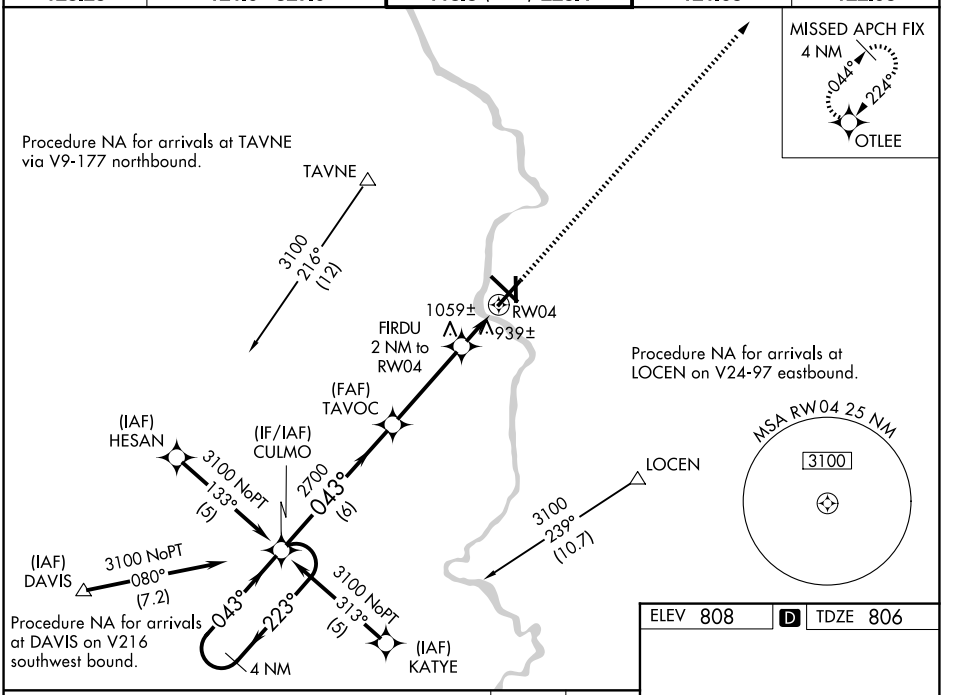

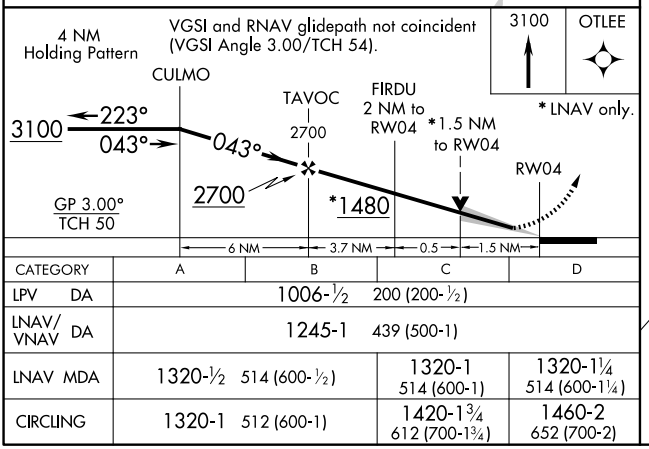

CATEGORY	A	B	C	D
LPV DA	1006-½ 200 (200-½)			
LNAV/VNAV DA	1245-1 439 (500-1)			
LNAV MDA	1320-½ 514 (600-½)		1320-1 514 (600-1)	1320-1¼ 514 (600-1¼)
CIRCLING	1320-1 512 (600-1)		1420-1¾ 612 (700-1¾)	1460-2 652 (700-2)

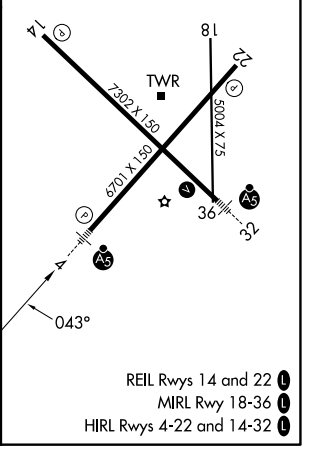

REIL Rwys 14 and 22 L
MIRL Rwy 18-36 L
HIRL Rwys 4-22 and 14-32 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026