RNAV (GPS) RWY 10

LAKELAND LINDER INTL (LAL)

WAAS CH 78305 W10A	APP CRS 096°	Rwy Ldg 8500 TDZE 132 Apt Elev 142


RNP APCH-GPS.


Circling NA to Rwys 8 and 26. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

ALSF-2


MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 direct PLUMY and hold.

ATIS	TAMPA APP CON	LAKELAND TOWER	GND CON
118.025	120.65 290.3	124.5 236.775	121.4

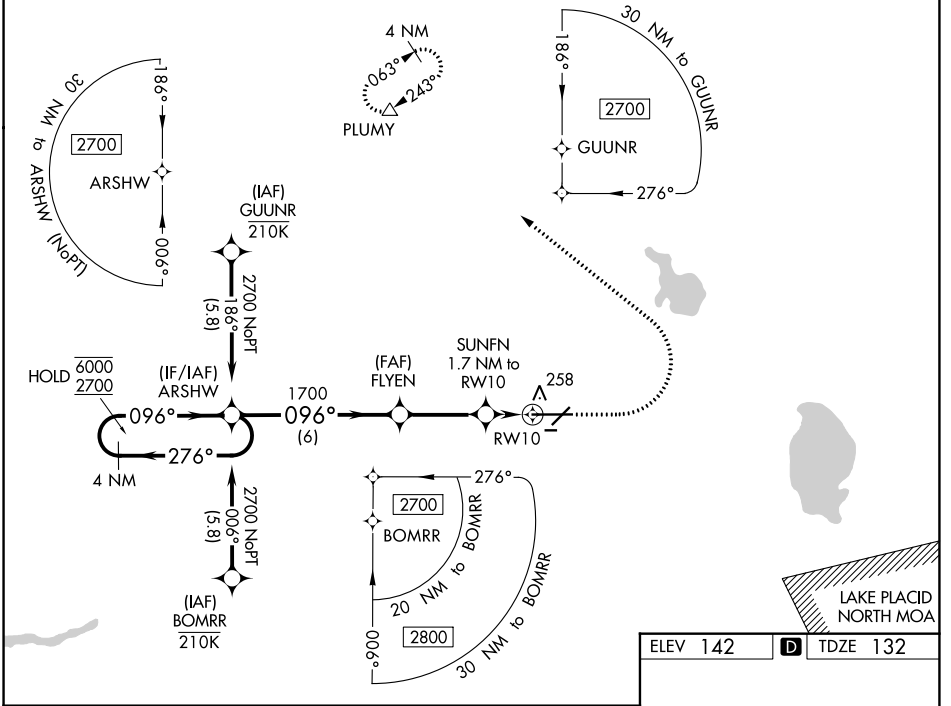

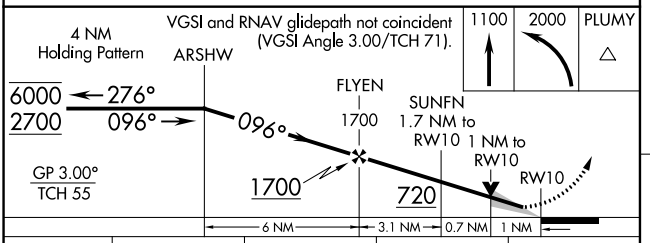

CATEGORY	A	B	C	D
LPV DA	332/18	200 (200-½)		
LNAV/VNAV DA	439/24	307 (300-½)		
LNAV MDA	520/24	388 (400-½)	520/35	388 (400-⅝)
CIRCLING	600-1 458 (500-1)	660-1 518 (600-1)	720-1½ 578 (600-1½)	840-2¼ 698 (700-2¼)



TDZL/RCLS Rwy 10
HIRL Rwys 5-23 and 10-28

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026