WAAS CH 77805 W23A	APP CRS 231°	Rwy Ldg 5000 TDZE 141 Apt Elev 142


RNAV (GPS) RWY 23
LAKELAND LINDER INTL (LAL)

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Plant City altimeter setting: increase LPV DA to 444 feet; increase LNAV/VNAV DA to 540 feet; increase all MDAs 20 feet and LNAV Cat C/D and Circling Cat C visibility ⅛ SM. Baro-VNAV and VDP NA when using Plant City altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwys 8 and 26.

MISSED APPROACH: Climb to 2000 direct BIYAT and right turn on track 330° to MIREE then on track 014° to PLUMY and hold.


ATIS	TAMPA APP CON	LAKELAND TOWER	GND CON
118.025	120.65 290.3	124.5 236.775	121.4

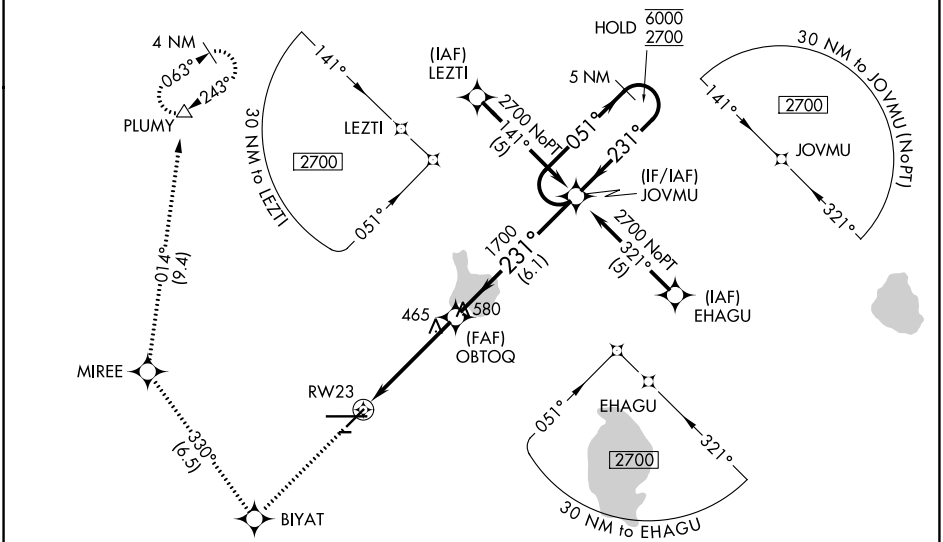

ELEV 142	D	TDZE 141



TDZL/RCLS Rwy 10
HIRL Rwys 5-23 and 10-28

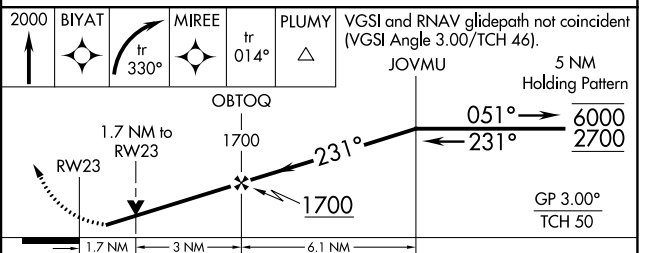

CATEGORY	A	B	C	D
LPV DA	426-1 285 (300-1)			
LNAV/VNAV DA	522-1¼ 381 (400-1¼)			
LNAV MDA	720-1 579 (600-1)		720-1⅝ 579 (600-1⅝)	720-1¾ 579 (600-1¾)
CIRCLING	720-1 578 (600-1)		720-1⅝ 578 (600-1⅝)	840-2¼ 698 (700-2¼)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026