
WAAS	APP CRS	Rwy Ldg	5186
CH 53620	149°	TDZE	99
W15A		Apt Elev	99


RNAV (GPS) RWY 15R
LONG ISLAND MAC ARTHUR (ISP)

Baro-VNAV NA when using Shirley altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 46°C (115°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shirley altimeter setting and increase LPV DA to 442 feet, LNAV/VNAV DA to 575 feet and LNAV/VNAV visibility all Cats ⅛ mile; all MDAs 40 feet, LNAV Cats C/D visibility ⅛ mile, and Circling Cats C/D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct CCC VOR/DME and hold.


ATIS	NEW YORK APP CON	LONG ISLAND TOWER ★	GND CON	UNICOM
120.725	120.05 343.75	119.3 (CTAF) L 335.5	135.3	122.95

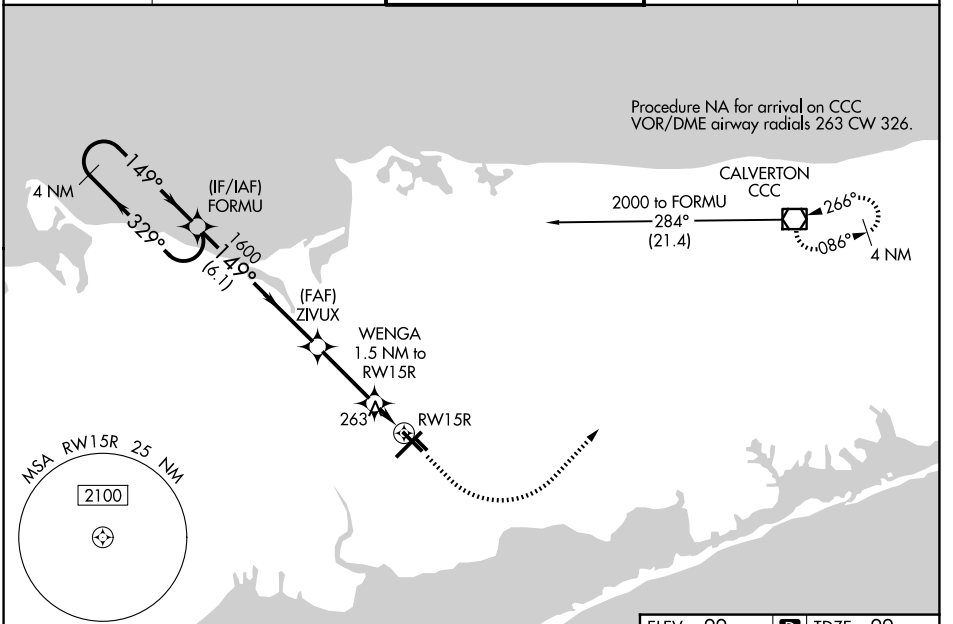

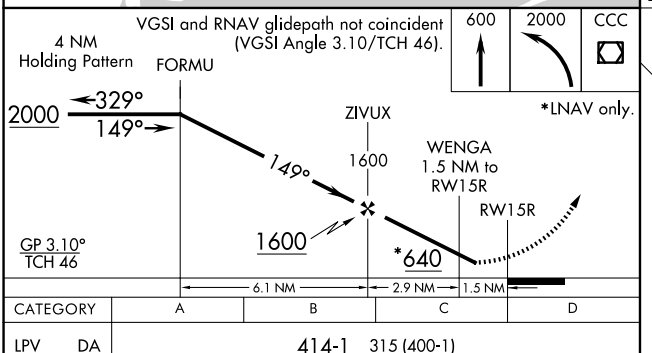

CATEGORY	A	B	C	D
LPV DA	414-1	315 (400-1)		
LNAV/VNAV DA	547-1⅜	448 (500-1⅜)		
LNAV MDA	520-1	421 (500-1)	520-1¼	421 (500-1¼)
CIRCLING	600-1 501 (600-1)	660-1 561 (600-1)	660-1½ 561 (600-1½)	960-2¾ 861 (900-2¾)

ELEV 99 D TDZE 99



MIRL Rwy 15R-33L L
HIRL Rwy 6-24 L

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026