APP CRS	Rwy Ldg	6006
058°	TDZE	186
	Apt Elev	212

RNAV (RNP) Y RWY 6

TRENTON MERCER (TTN)


For uncompensated Baro-VNAV systems, procedure NA below -13°C (8°F) or above 54°C (130°F).
GPS required.
For inoperative MALSR, increase RNP 0.10 DA all Cats visibility to 1 mile, increase RNP 0.30 DA all Cats visibility to 1⅜ mile.

MALSR

MISSED APPROACH: Climb to 2600 direct BIRKE and hold.


ATIS	PHILADELPHIA APP CON	TRENTON TOWER ★	GND CON	UNICOM
126.775	123.8 291.7	120.7 (CTAF) L 257.8	121.9 257.8	122.95

RADAR REQUIRED

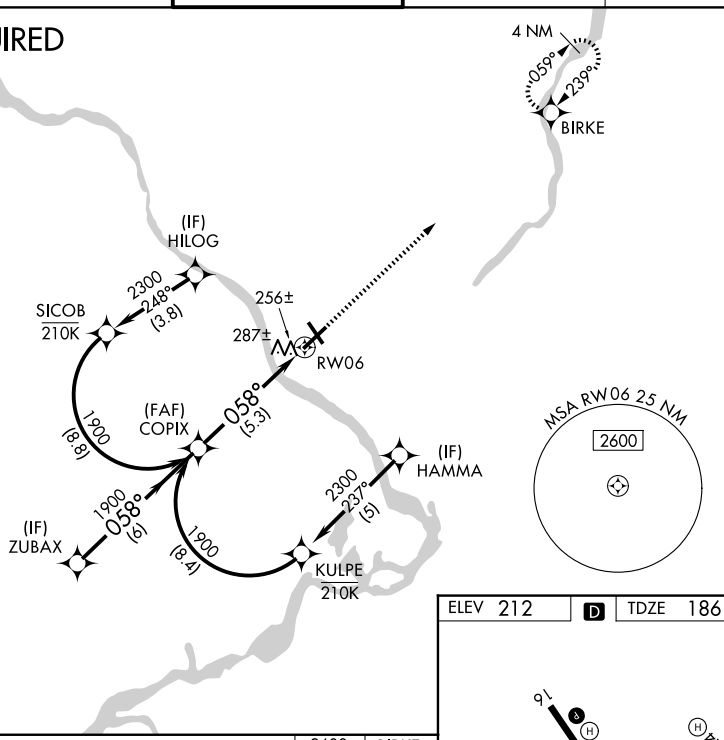

VGSI and RNAV glidepath not coincident.
See planview for multiple IF locations.


2600 BIRKE

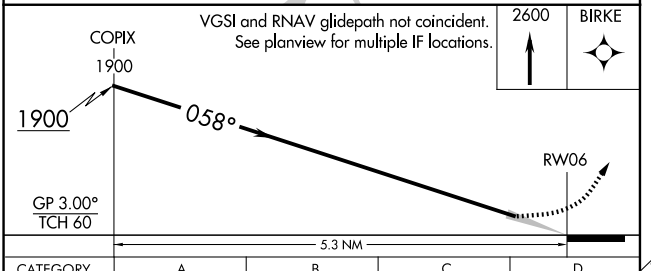

CATEGORY	A	B	C	D
RNP 0.10 DA		510-½	324 (300-½)	
RNP 0.30 DA		668-1⅛	482 (500-1⅛)	

AUTHORIZATION REQUIRED

ELEV 212 D TDZE 186

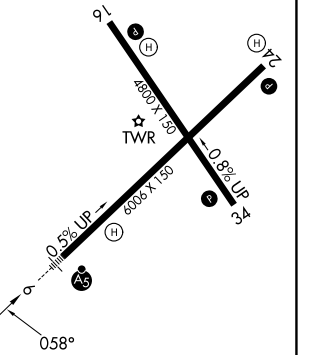

HIRL Rwys 6-24 and 16-34 L
REIL Rwys 16, 24 and 34 L

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026