ILS or LOC RWY 27

ATHENS/BEN EPPS (AHN)

LOC I-AHN	APP CRS	Rwy Ldg	6122
110.95	274°	TDZE	812
		Apt Elev	812


DME required.

Circling Rwy 2, 20 NA at night. VDP NA when using WDR altimeter setting.
DME from AHN VOR/DME. Simultaneous reception of I-AHN and AHN DME required.
When local altimeter setting not received, use WDR altimeter setting and increase S-ILS 27 DA to 1069 feet; increase all MDAs 60 feet and S-LOC 27 visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. Inop table does not apply to S-ILS 27 all Cats.


MALSF

MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 on heading 060° and AHN VOR/DME R-092 to VESTO INT/ AHN 23.6 DME and hold.

ASOS	ATLANTA APP CON ★	ATHENS TOWER ★	GND CON	UNICOM
132.875	132.475 291.1	126.3 (CTAF) L 338.275	121.8	122.95

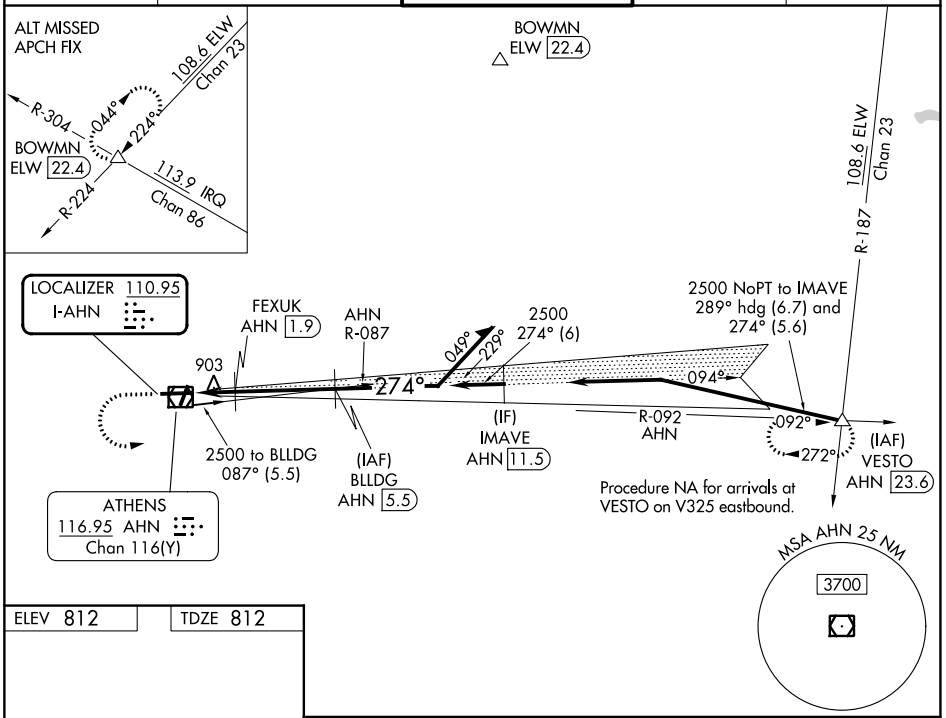

ELEV 812	TDZE 812




MIRL Rwy 2-20
HIRL Rwy 9-27 L

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

1500	2500 hdg 060°	AHN R-092	VESTO

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 44).

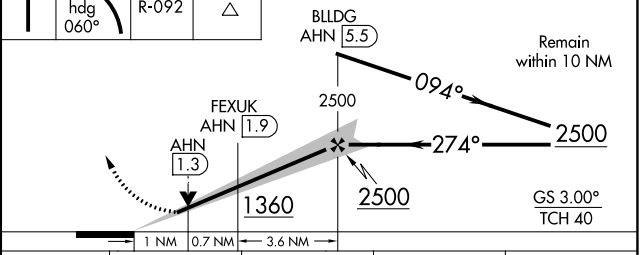

CATEGORY	A	B	C	D
S-ILS 27	1012-¾ 200 (200-¾)			
S-LOC 27	1160-¾ 348 (400-¾)			
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026