RNAV (GPS) RWY 27

ATHENS/BEN EPPS (AHN)

WAAS CH 69503 W27A	APP CRS 274°	Rwy Ldg 6122 TDZE 812 Apt Elev 812


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Circling to Rwy 2, 20 NA at night. When local altimeter setting not received, use WDR altimeter setting: increase LPV DA to 1069 feet; increase LNAV/VNAV DA to 1121 feet; increase all MDAs 60 feet and increase LNAV Cat C, D visibility ¼ SM and Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA when using WDR altimeter setting. Inop table does not apply to LPV and LNAV/VNAV all Cats.


MALSF

MISSED APPROACH: Climb to 2500 direct SALIN and hold.


ASOS	ATLANTA APP CON ★	ATHENS TOWER ★	GND CON	UNICOM
132.875	132.475 291.1	126.3 (CTAF) L 338.275	121.8	122.95

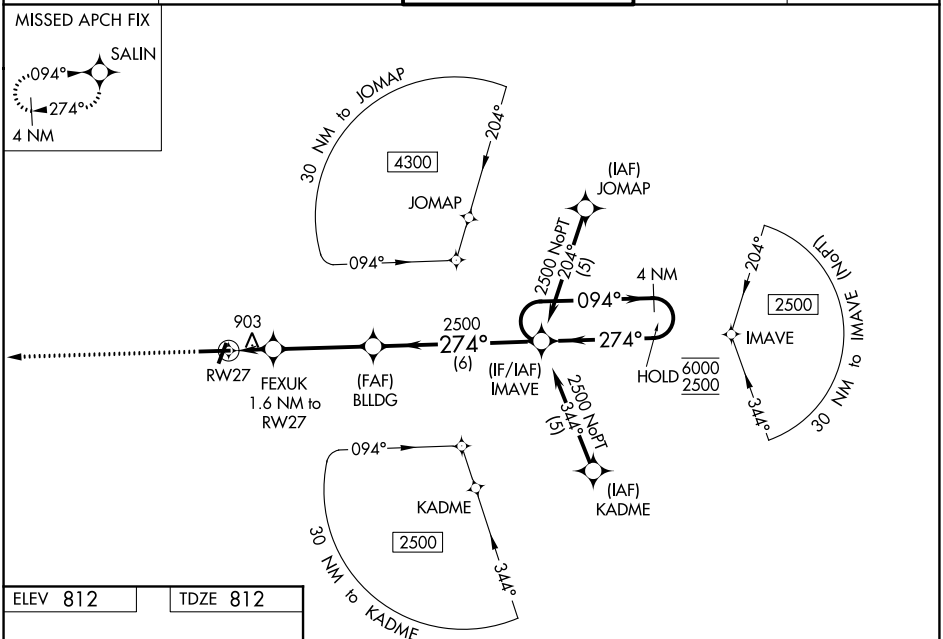

ELEV 812	TDZE 812



MIRL Rwy 2-20
HIRL Rwy 9-27 L

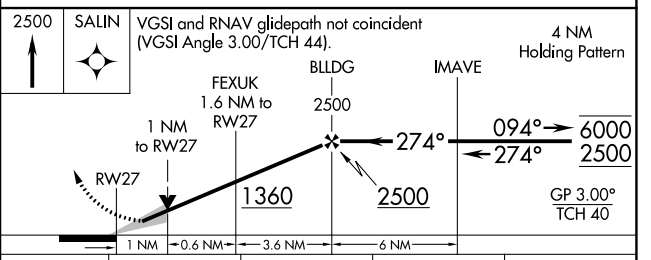

CATEGORY	A	B	C	D
LPV DA	1012-¾		200 (200-¾)	
LNAV/VNAV DA	1064-¾		252 (300-¾)	
LNAV MDA	1160-¾		348 (400-¾)	
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026