LOC/DME I-MVP	APP CRS	Rwy Ldg	7302
111.55	196°	TDZE	1320
Chan 52 (Y)		Apt Elev	1333

ILS or LOC RWY 19L


WICHITA DWIGHT D EISENHOWER NTL (ICT)


ADF required. Simultaneous approach authorized with ILS or LOC RWY 19R. For inoperative MALSR, increase S-ILS 19L Cat E visibility to ¾ mile, S-LOC 19L Cat E visibility to 1⅜ mile, NUMAE fix minimums: S-LOC 19L Cat C/D/E visibility to 1 mile.


MALSR

MISSED APPROACH: Climb to 3000 direct PICHE LOM and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON
125.15	126.7 353.5	118.2 257.8	121.9 348.6

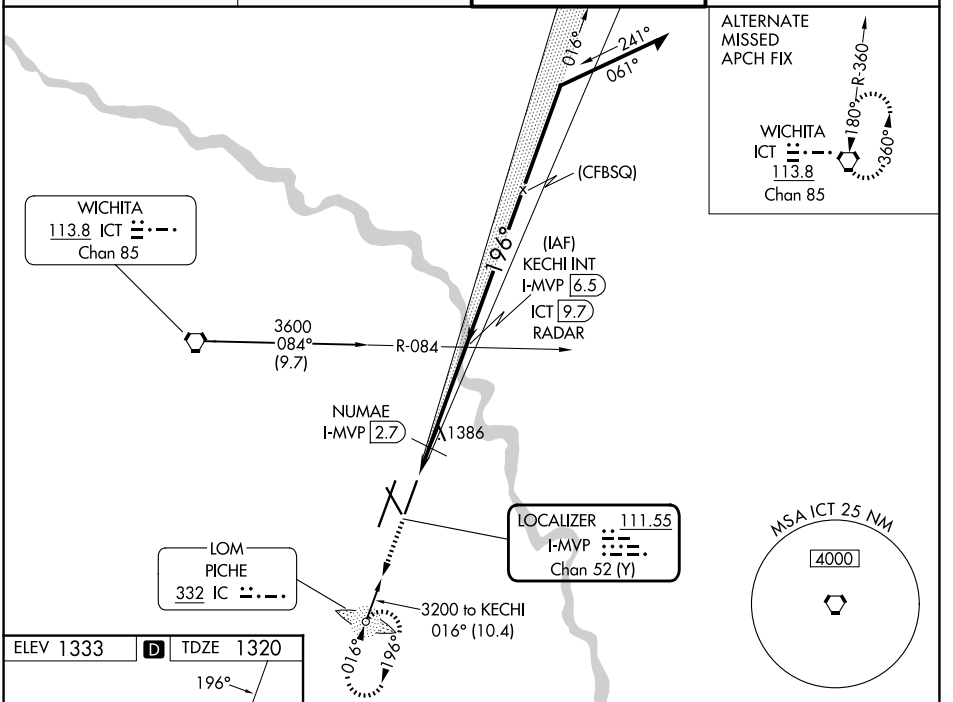

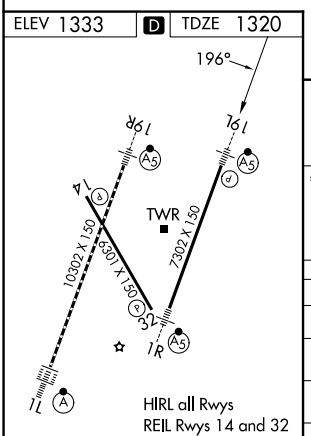

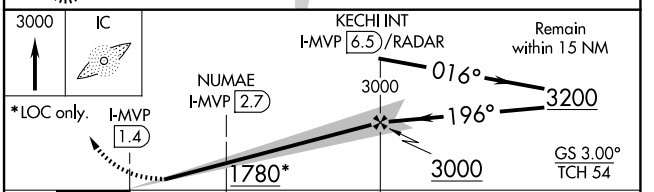

CATEGORY	A	B	C	D	E
S-ILS 19L	1520-½ 200 (200-½)				
S-LOC 19L	1780-½ 460 (500-½)		1780-⅞ 460 (500-⅞)		
CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)
NUMAE FIX MINIMUMS (DME REQUIRED)					
S-LOC 19L	1700-½ 380 (400-½)		1700-⅝ 380 (400-⅝)		
CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026