ILS or LOC RWY 1R

WICHITA DWIGHT D EISENHOWER NTL (ICT)

LOC/DME I-ICT	APP CRS	Rwy Ldg	7302
110.3	016°	TDZE	1321
Chan 40		Apt Elev	1333

RADAR required for procedure entry. ADF and DME required.


TA Simultaneous approach authorized. For inop ALS increase S-ILS 1R Cat E visibility to RVR 4000, increase S-LOC 1R Cat C-E visibility to RVR 5500.

* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: (Do not exceed 230K until PICHE LOM/I-ICT 5.5 DME) Climb to 3400 then climbing right turn to 4000 to PICHE LOM/I-ICT 5.5 DME and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON
125.15	126.7 353.5	118.2 257.8	121.9 348.6

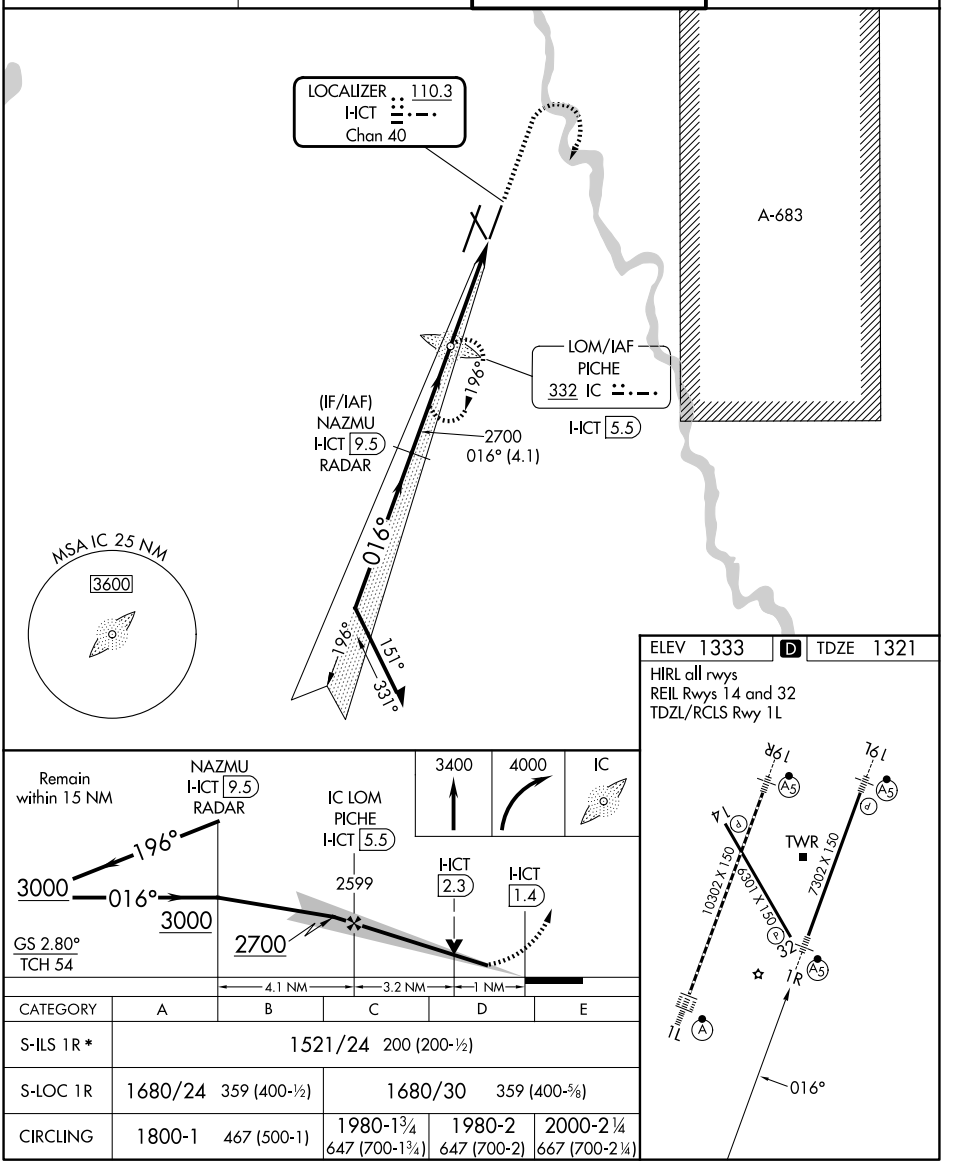

CATEGORY	A	B	C	D	E
S-ILS 1R *	1521/24 200 (200-½)				
S-LOC 1R	1680/24 359 (400-½)		1680/30 359 (400-⅝)		
CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026