WAAS	APP CRS	Rwy Ldg	7302
CH 49119	196°	TDZE	1320
W19B		Apt Elev	1333

RNAV (GPS) Y RWY 19L

WICHITA DWIGHT D EISENHOWER NTL (ICT)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Simultaneous approach authorized with ILS or LOC RWY 19R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR (A5)


MISSED APPROACH: Climb to 3600 direct YELOO and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON
125.15	126.7 353.5	118.2 257.8	121.9 348.6

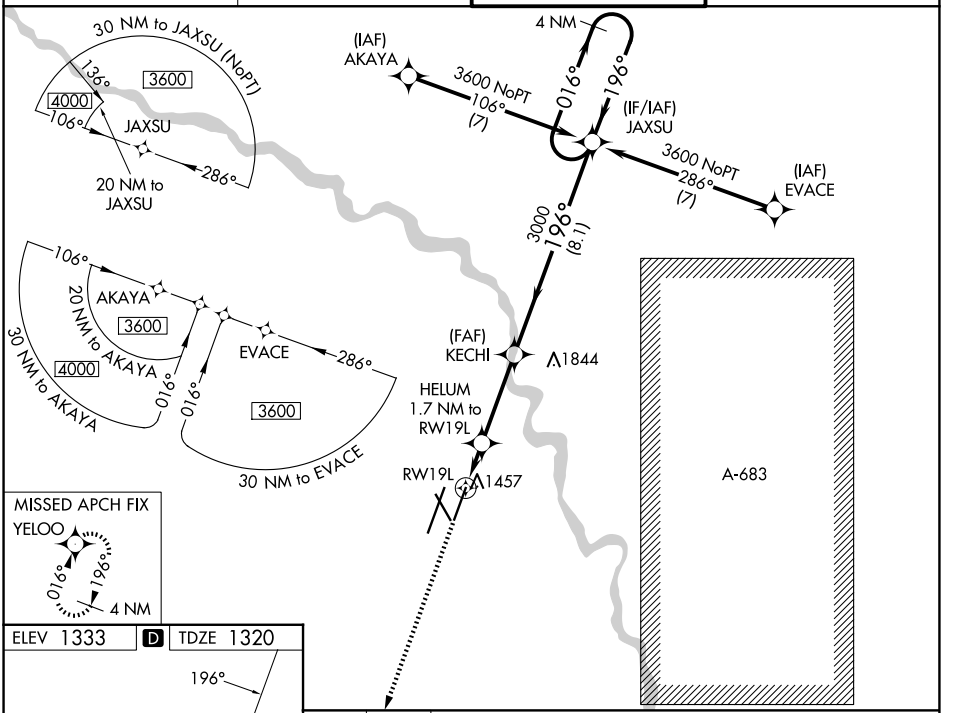


MISSED APCH FIX

ELEV 1333 D TDZE 1320

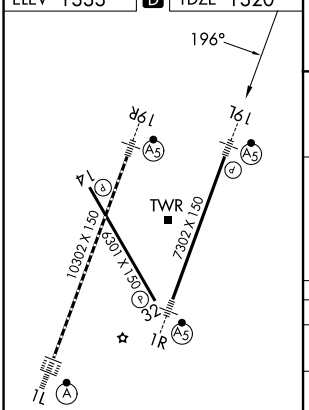

HIRL all Rwys
REIL Rwys 14 and 32
TDZ/CL Rwy 1L

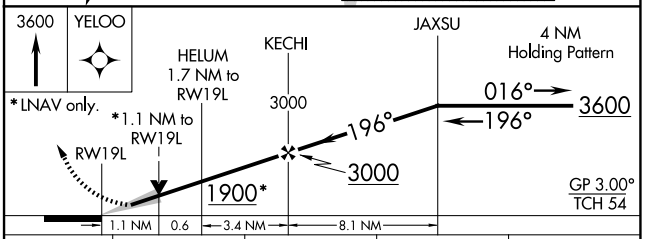

CATEGORY	A	B	C	D
LPV DA	1520-½ 200 (200-½)			
LNAV/VNAV DA	1747-¾ 427 (500-¾)			
LNAV MDA	1780-½ 460 (500-½)		1780-⅞ 460 (500-⅞)	
CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026