RNAV (GPS) RWY 36


ARANSAS COUNTY (RKP)

WAAS	APP CRS	Rwy Idg	4498
CH 61317	004°	TDZE	23
W36A		Apt Elev	24


Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet. VDP NA with Ingleside altimeter setting.

MISSED APPROACH: Climb to 2000 direct UDLAY and hold.


ASOS	CORPUS APP CON	CLNC DEL	UNICOM
119.275	120.9 348.725	121.7	123.05 (CTAF) L

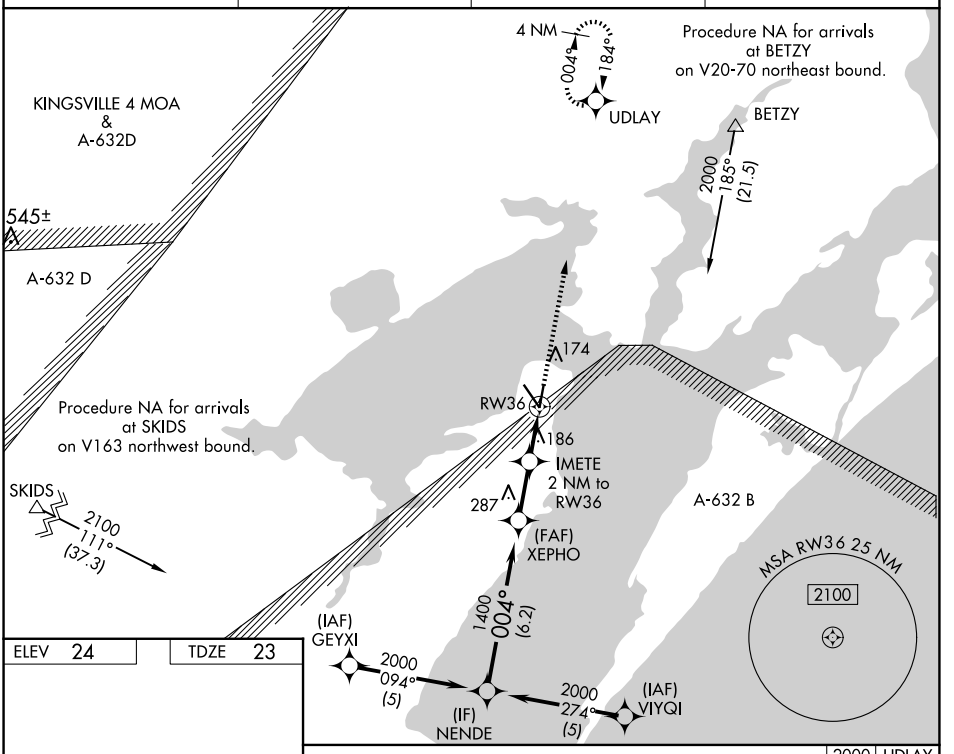

ELEV 24 TDZE 23



REIL Rwy 14 L
MIRL Rwys 14-32 and 18-36 L

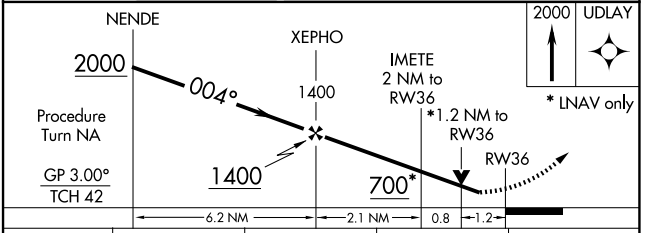

CATEGORY	A	B	C	D
LPV DA	273-1 250 (300-1)			NA
LNAV/VNAV DA	498-1¾ 475 (500-1¾)			NA
LNAV MDA	440-1 417 (500-1)		440-1¼ 417 (500-1¼)	NA
CIRCLING	500-1 476 (500-1)		500-1½ 476 (500-1½)	NA

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026