# ILS Y or LOC Y RWY 20R

KENAI MUNI (ENA) (PAEN)

| LOC/DME I-ENA | APP CRS | Rwy Ldg | 7575 |
|---|---|---|---|
| 108.9 | 196° | TDZE | 98 |
| Chan 26 | | Apt Elev | 100 |


TACAN required.


T A — Circling NA to Rwys 2W and 20W. Circling Rwy 2R, 20L NA at night. For inop ALS, increase S-ILS 20R Cat E visibility to RVR 4000. For inop ALS, increase S-LOC 20R Cat E visibility to 1¼ SM.
# RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 4000 on heading 046° and on EDF TACAN R-212 to TBONE INT/EDF 49.2 DME and hold.
† Missed approach requires minimum climb of 800 feet per NM to 4000; if unable to meet climb gradient, see ILS Z or LOC Z RWY 20R.

| ATIS | ANCHORAGE CENTER | KENAI TOWER* | GND CON | KENAI RADIO |
|---|---|---|---|---|
| 133.35 | 125.7 379.1 | 121.3 (CTAF) L 239.3 | 118.75 | 122.65 L |

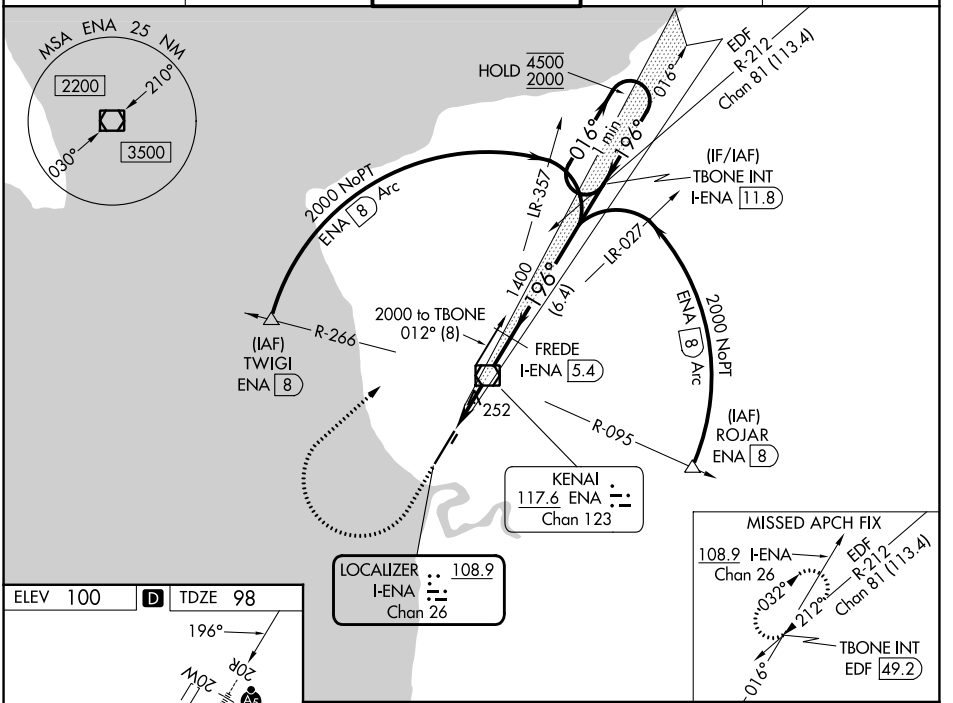

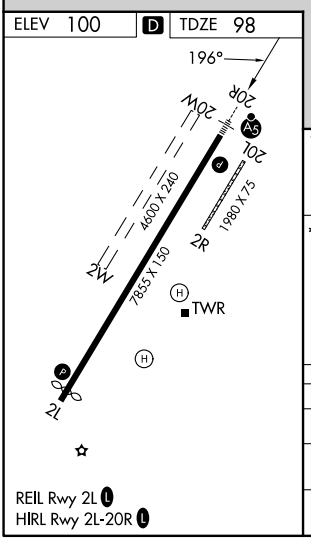
| CATEGORY | A | B | C | D | E |
|---|---|---|---|---|---|
| S-ILS 20R #† | 298/24 200 (200-½) | | | | |
| S-LOC 20R† | 520/24 422 (500-½) | | 520/40 422 (500-¾) | | |
| CIRCLING | 560-1 460 (500-1) | 580-1 480 (500-1) | 580-1½ 480 (500-1½) | 680-2 580 (600-2) | 760-2¼ 660 (700-2¼) |

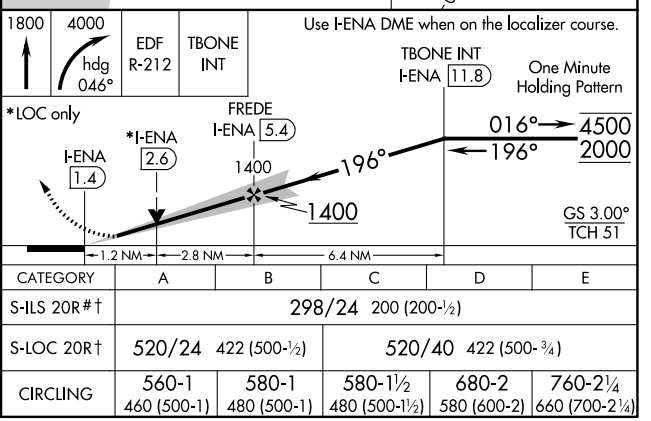

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026