WAAS	APP CRS	Rwy Ldg 7575
CH 99504	196°	TDZE 98
W20A		Apt Elev 100

RNAV (GPS) RWY 20R

KENAI MUNI (ENA) (PAEN)


RNP APCH.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Soldotna altimeter setting. Circling Rwy 2R, 20L NA at night. When local altimeter setting not received, use Soldotna altimeter setting and increase all DA 22 feet and all MDA 40 feet, increase LNAV visibility Cat C and D to RVR 5000. Circling Rwy 2W, 20W NA. # RVR 1800 authorized with use of FD or AP or HUD to DA. (NA when using Soldotna altimeter setting).

MALSR (A5)


MISSED APPROACH: Climb to 2000 direct FOPTY and hold.

ATIS	ANCHORAGE CENTER	KENAI TOWER★	GND CON	KENAI RADIO
133.35	125.7 379.1	121.3 (CTAF) L 239.3	118.75	122.65 L

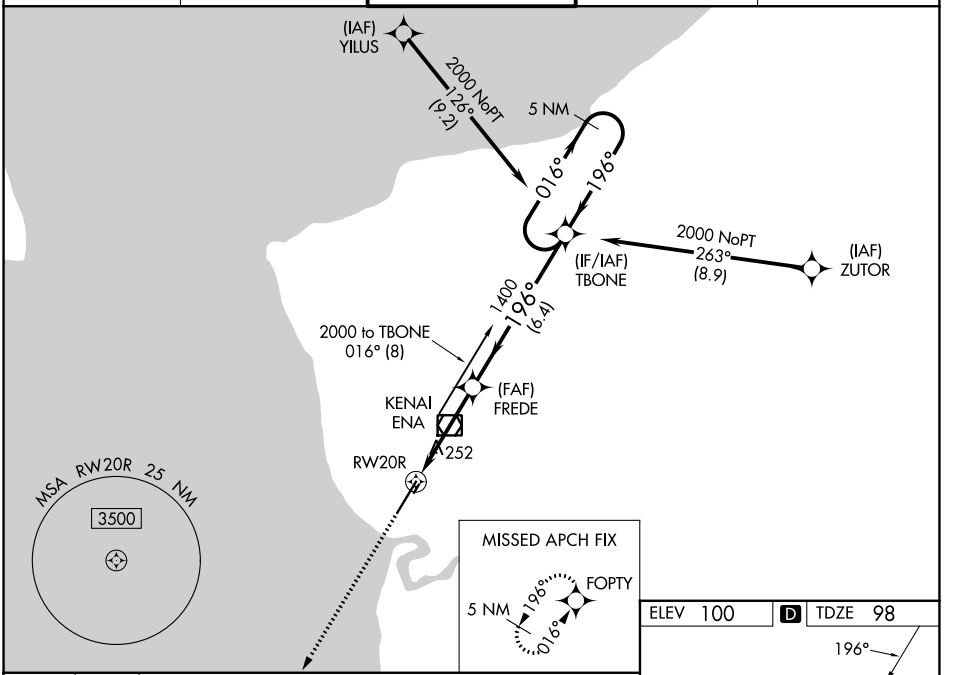

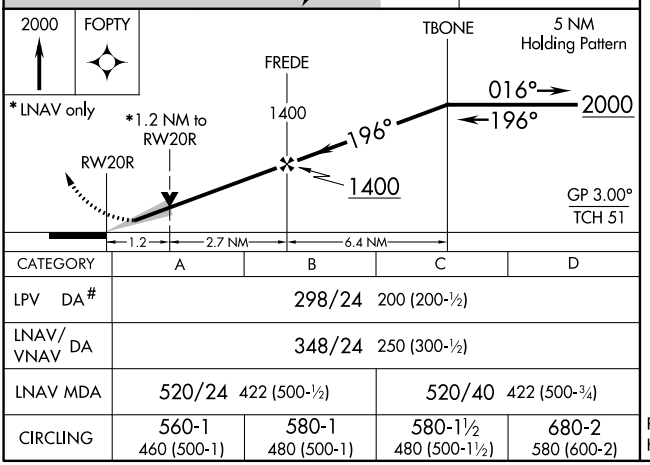

CATEGORY	A	B	C	D
LPV DA#	298/24 200 (200-½)			
LNAV/VNAV DA	348/24 250 (300-½)			
LNAV MDA	520/24 422 (500-½)		520/40 422 (500-¾)	
CIRCLING	560-1 460 (500-1)	580-1 480 (500-1)	580-1½ 480 (500-1½)	680-2 580 (600-2)

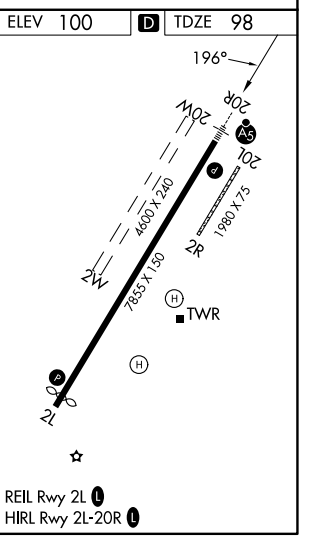

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026