RNAV (RNP) Z RWY 6R

GUAM INTL (GUM)(PGUM)

APP CRS	Rwy Ldg	10014
063°	TDZE	258
	Apt Elev	305


RNP AR APCH - GPS.


For uncompensated Baro-VNAV systems, procedure NA below 19°C or above 48°C. Rwy 6R helicopter visibility reduction below ¾ SM NA. For inop ALS increase RNP 0.30 all Cats visibility to 1⅛. Inop table does not apply to RNP 0.30*.

MALSR

MISSED APPROACH: Climb to 3000 on 063° track to CIBOL and hold.
*Missed approach requires minimum climb of 285 feet per NM to 1400.

ATIS	GUAM CERAP	AGANA TOWER	GND CON
119.0	119.8 269.0	118.1 340.2	121.9 336.4

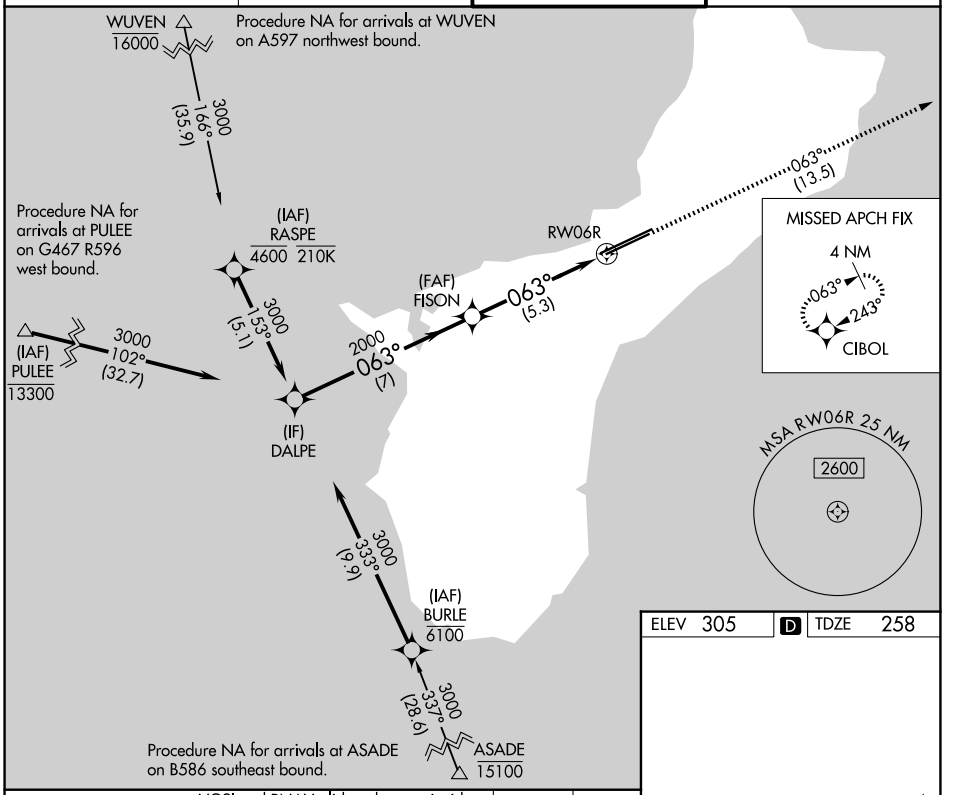


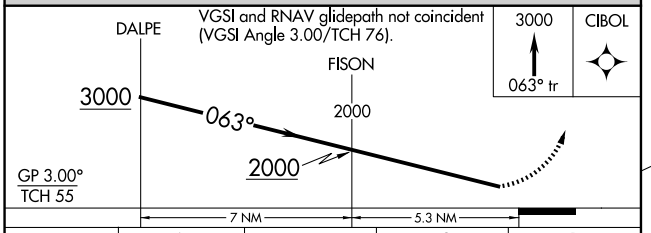

CATEGORY	A	B	C	D
RNP 0.30 DA*	511-¾ 253 (300-¾)			
RNP 0.30 DA	656-¾ 398 (400-¾)			

AUTHORIZATION REQUIRED

ELEV 305 D TDZE 258



HIRL all Rwys

PAC, 29 OCT 2026 to 24 DEC 2026
PAC, 29 OCT 2026 to 24 DEC 2026