RNAV (GPS) RWY 14

DELAWARE COUNTY RGNL (MIE)


WAAS	APP CRS	Rwy Ldg	6500
CH 56401	139°	TDZE	933
W14A		Apt Elev	937

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using FWA altimeter setting. When local altimeter not received, use FWA altimeter setting and increase LPV DA to 1254 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1339 feet and all visibilities ¼ SM. Increase all MDAs 140 feet and LNAV visibility Cat C/D ⅜ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 2900 direct CITUK and hold.


ATIS	INDIANAPOLIS APP CON	MUNCIE TOWER ★	GND CON	UNICOM
133.25	120.65 317.8	120.1 (CTAF) L	121.9	122.95

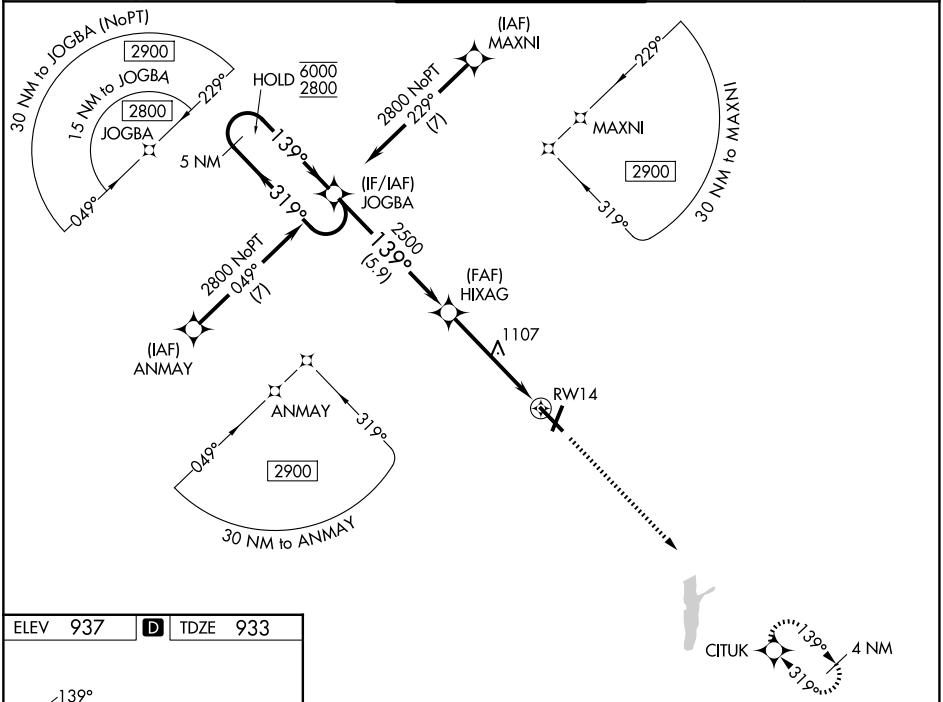

ELEV 937	D	TDZE 933



HIRL Rwy 14-32 L
MIRL Rwy 3-21 L
REIL Rwys 3, 14 and 21 L

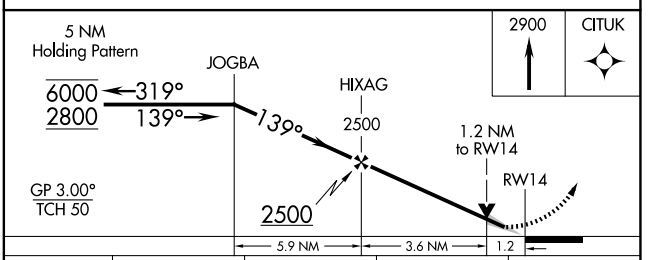

CATEGORY	A	B	C	D
LPV DA		1133-¾	200 (200-¾)	
LNAV/VNAV DA		1218-⅞	285 (300-⅞)	
LNAV MDA	1360-1	427 (500-1)	1360-1¼	427 (500-1¼)
CIRCLING	1400-1	463 (500-1)	1500-1½ 563 (600-1½)	1560-2 623 (700-2)

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026