RNAV (GPS) RWY 21

DELAWARE COUNTY RGNL (MIE)


WAAS CH 53537 W21A	APP CRS 205°	Rwy Ldg 5197 TDZE 935 Apt Elev 937


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 21 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using FWA altimeter setting. When local altimeter setting not received, use FWA altimeter setting and increase LPV DA to 1316 feet and all visibilities ⅜ SM. Increase LNAV/VNAV DA to 1472 feet and all visibilities ⅜ SM. Increase all MDAs 140 feet and LNAV visibility Cat C/D ⅜ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 2800 direct APPAL and hold.

ATIS	INDIANAPOLIS APP CON	MUNCIE TOWER ★	GND CON	UNICOM
133.25	120.65 317.8	120.1 (CTAF) L	121.9	122.95

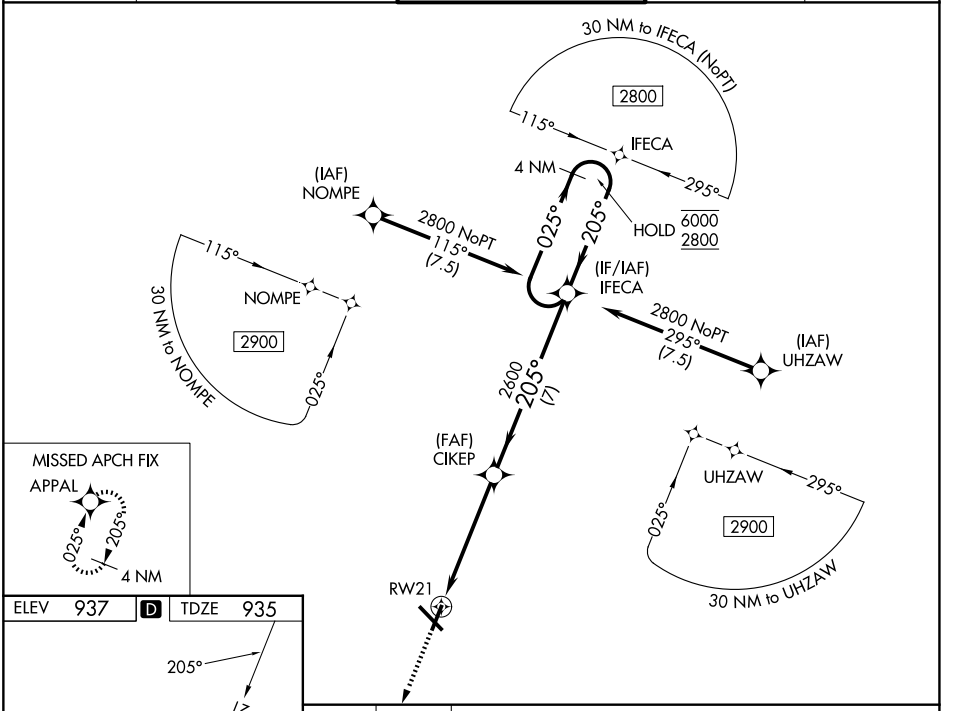

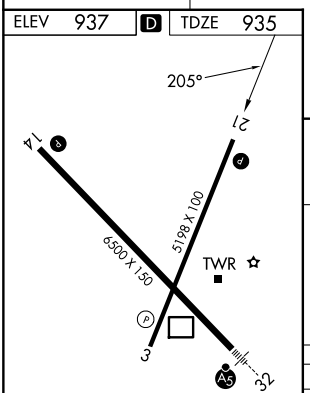

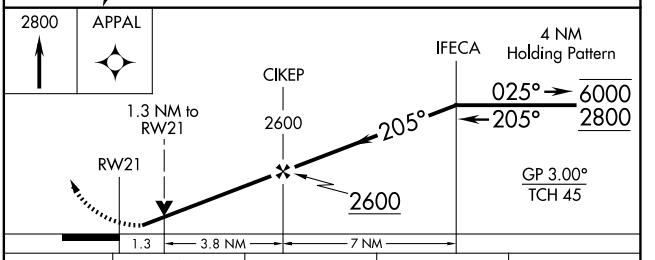

CATEGORY	A	B	C	D
LPV DA	1195-¾ 260 (300-¾)			
LNAV/VNAV DA	1351-1⅛ 416 (500-1⅛)			
LNAV MDA	1400-1 465 (500-1)		1400-1⅜ 465 (500-1⅜)	
CIRCLING	1460-1 523 (600-1)		1500-1½ 563 (600-1½)	1600-2 663 (700-2)

HIRL Rwy 14-32 L
MIRL Rwy 3-21 L
REIL Rwys 3, 14 and 21 L

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026