WAAS	APP CRS	Rwy Ldg	5197
CH 78237	025°	TDZE	937
W03A		Apt Elev	937

RNAV (GPS) RWY 3


DELAWARE COUNTY RGNL (MIE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all DA 121 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility ⅜ mile, LNAV/VNAV all Cats visibility ⅞ mile and Circling Cats C/D visibility ½ mile. Baro-VNAV NA when using Fort Wayne Intl altimeter setting. Helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 2800 direct IFECA and hold.


ATIS	INDIANAPOLIS APP CON	MUNCIE TOWER ★	GND CON	UNICOM
133.25	120.65 317.8	120.1 (CTAF) L	121.9	122.95


RADAR REQUIRED

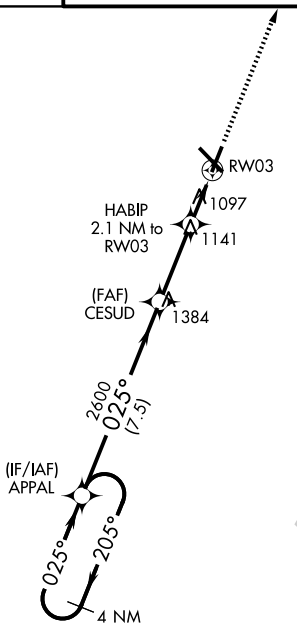

MISSED APCH FIX






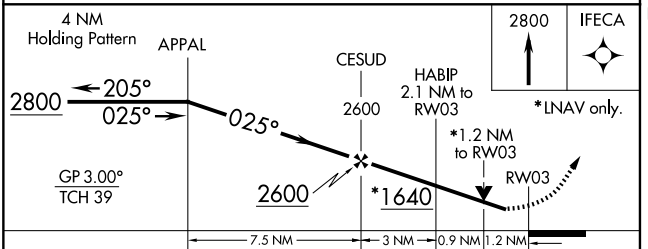

CATEGORY	A	B	C	D
LPV DA	1190-⅞ 253 (300-⅞)			
LNAV/VNAV DA	1412-1⅝ 475 (500-1⅝)			
LNAV MDA	1360-1 423 (500-1)		1360-1¼ 423 (500-1¼)	
CIRCLING	1460-1 523 (600-1)		1500-1½ 563 (600-1½)	1600-2 663 (700-2)

ELEV	937	D	TDZE	937

HIRL Rwy 14-32 L
MIRL Rwy 3-21 L
REIL Rwys 3, 14 and 21 L

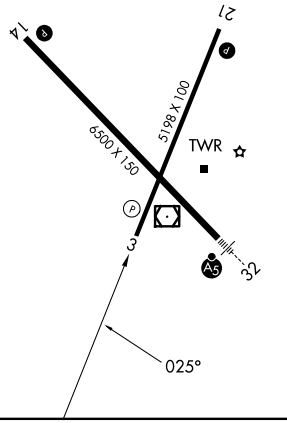

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026