LOC I-ANB	APP CRS	Rwy Ldg / TDZE / Apt Elev
111.5	052°	7002 / 595 / 612

ILS Z or LOC Z RWY 5


ANNISTON RGNL (ANB)

Circling NA north of Rwy 5-23. ADF required. When local altimeter setting not received, use Gadsden altimeter setting: increase DA to 975 and all visibilities ¼ SM: all MDAs 80 feet, and all Cat C visibilities ½ SM. For inop ALS increase S-ILS 5 all Cats visibility to 1 SM. For inop ALS when using Gadsden altimeter setting, increase S-ILS 5 all Cats visibility to 1¼ SM.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 on heading 110° then on BOGGA LOM 260° course to BOGGA LOM and hold.

AWOS-3	BIRMINGHAM APP CON	CTAF	UNICOM
119.675	132.15 285.45	123.6 L	123.0

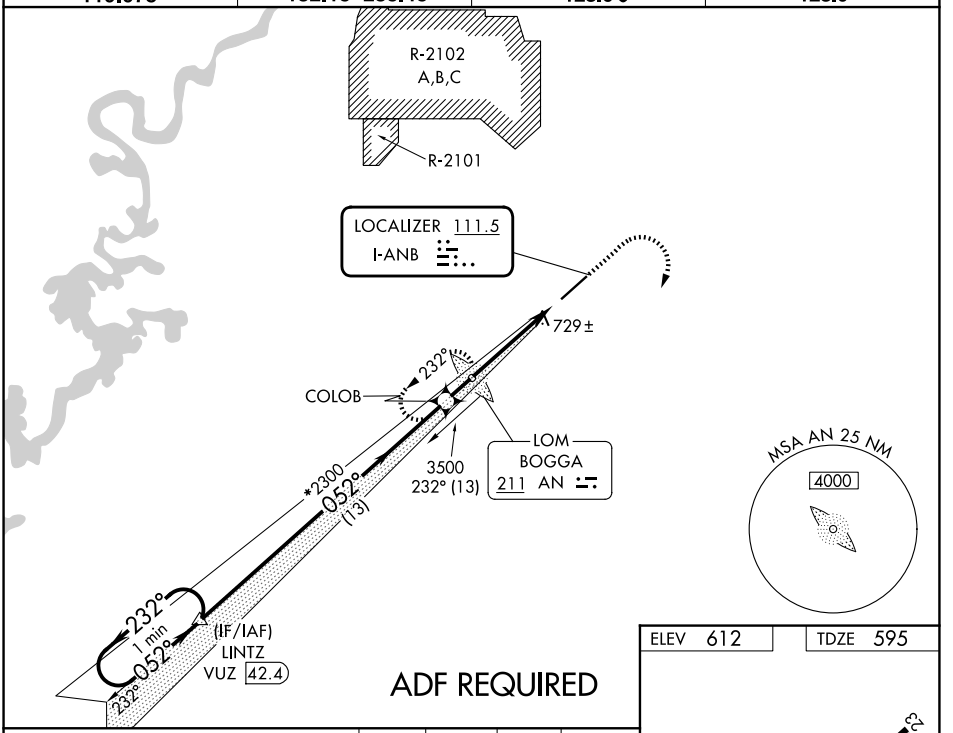

ELEV 612 TDZE 595

LOC restricted beyond 16° right of course.

1600	4000	AN	BOGGA
↑	hdg 110°	crs 260°	

One Minute Holding Pattern

LINTZ VUZ 42.4

COLOB


AN BOGGA LOM

*LOC only.

3400 232° 052° 052° 2400 2400 *2300

GS 3.00° TCH 40

11.8 NM 1.2 NM 4.3 NM



REIL Rwy 23 L
HIRL Rwy 5-23 L

CATEGORY	A	B	C	D
S-ILS 5	909-½ 314 (300-½)			
S-LOC 5	1120-½ 525 (600-½)		1120-1 525 (600-1)	NA
CIRCLING	1420-1 808 (900-1)		1420-2¼ 808 (900-2¼)	1820-3 1208 (1300-3)

FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026