RNAV (GPS) RWY 21

SANTA MONICA MUNI (SMO)


WAAS	APP CRS	Rwy Ldg	3500
CH 90339	213°	TDZE	170
W21A		Apt Elev	170

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 14°C (58°F). Rwy 21 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 600 then climbing right turn to 5000 direct CAPOB and on track 283° to SADDE and hold, continue climb-in-hold to 5000.

ATIS	SOCAL APP CON	SANTA MONICA TOWER*	GND CON	UNICOM
119.15	135.05 317.5	120.1 (CTAF) L 257.8	121.9	122.95

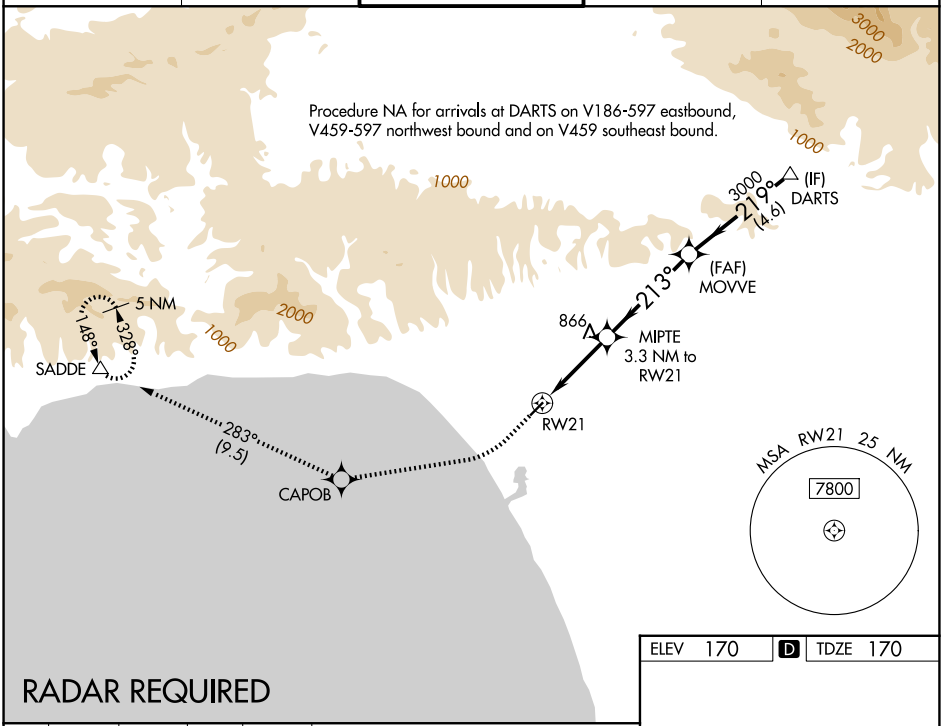



ELEV 170 D TDZE 170

600 | 5000 | CAPOB | tr 283° | SADDE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 45).

*LNAV only

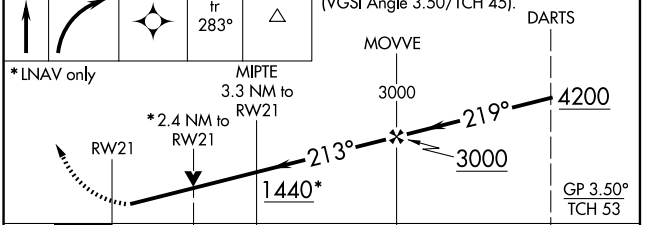



CATEGORY	A	B	C	D
LPV DA	440-1 270 (300-1)			
LNAV/VNAV DA	685-1⅜ 515 (600-1⅜)			
LNAV MDA	1120-1¼ 950 (1000-1¼)		1120-2½ 950 (1000-2½)	

MIRL Rwy 3-21 L

REIL Rwy 21 L

SW-3, 29 OCT 2026 to 26 NOV 2026
SW-3, 29 OCT 2026 to 26 NOV 2026