WAAS	APP CRS	Rwy Ldg	5506
CH 56531	249°	TDZE	790
W25A		Apt Elev	812


RNAV (GPS) RWY 25


CAPITAL CITY (FFT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase all LPV DA to 1160 feet and LNAV/VNAV DA to 1171 feet and all LPV visibilities ¼ mile, all LNAV/VNAV visibilities ⅛ mile; increase all MDAs 80 feet and visibility Cats C and D ¼ mile. VDP and Baro-VNAV NA with Lexington altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct DEXLO and hold.


ASOS	LEXINGTON APP CON	CLNC DEL	UNICOM
119.275	120.75 298.9	118.65	122.8 (CTAF) L

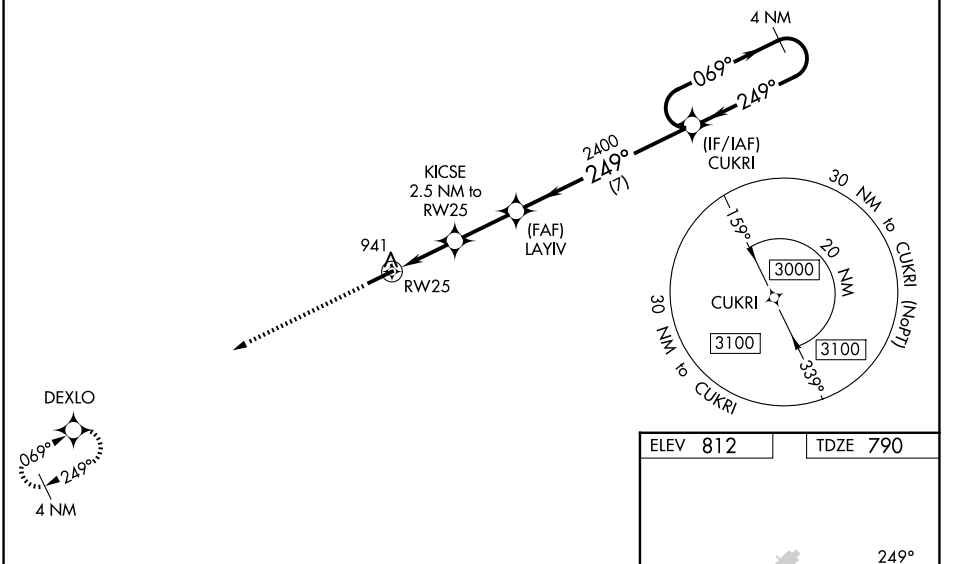

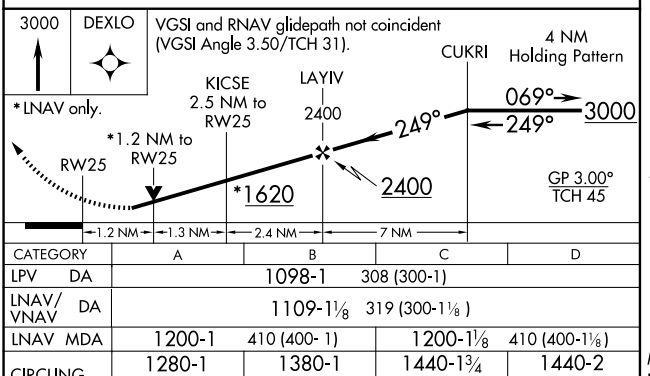

CATEGORY	A	B	C	D
LPV DA	1098-1	308 (300-1)		
LNAV/VNAV DA	1109-1⅛	319 (300-1⅛)		
LNAV MDA	1200-1	410 (400- 1)	1200-1⅛	410 (400-1⅛)
CIRCLING	1280-1 468 (500-1)	1380-1 568 (600-1)	1440-1¾ 628 (700-1¾)	1440-2 628 (700-2)

ELEV 812 TDZE 790



MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026