LOC/DME I-CGF	APP CRS	Rwy Ldg	5000
111.1	237°	TDZE	873
Chan 48		Apt Elev	876

ILS or LOC RWY 24

CUYAHOGA COUNTY (CGF)


RNP APCH - GPS.

Autopilot coupled approach NA below 1513. VDP NA when using CLE altimeter setting. When local altimeter setting not received, use CLE altimeter setting and increase S-ILS 24 DA to 1131 feet; increase all MDAs 60 feet and S-LOC 24 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MALSR

MISSED APPROACH: Climb to 1600 then climbing left turn to 3100 direct BRICC and hold.


D-ATIS	CLEVELAND APP CON	COUNTY TOWER★	GND CON
119.95	125.35 346.325	127.95 (CTAF) L	121.85

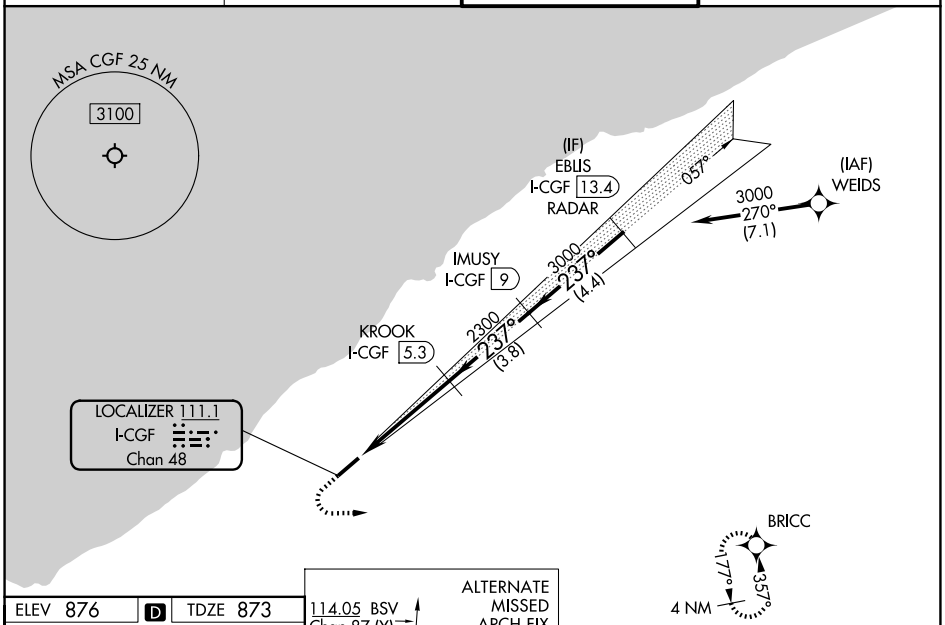


ELEV 876 D TDZE 873

ALTERNATE MISSED APCH FIX

114.05 BSV
Chan 87 (Y)
096°
113.6 DJB
Chan 83
276°
R-096
R-008
WEXER
DJB 35.5



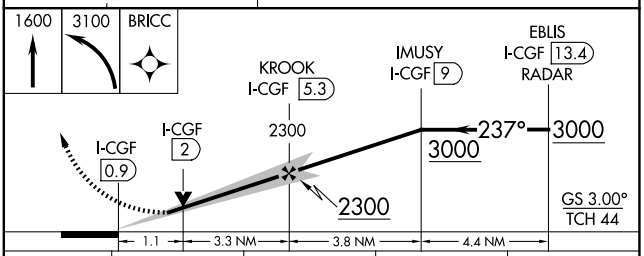

CATEGORY	A	B	C	D
S-ILS 24	1073-½ 200 (200-½)			
S-LOC 24	1260-½	387 (400-½)	1260-⅝	387 (400-⅝)
CIRCLING	1420-1 544 (600-1)	1500-1 624 (700-1)	1560-2 684 (700-2)	1640-2½ 764 (800-2½)

REIL Rwy 6 L
HIRL Rwy 6-24 L

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026