RNAV (GPS) RWY 6

CUYAHOGA COUNTY (CGF)


WAAS	APP CRS	Rwy Ldg	5184
CH 70628	057°	TDZE	874
W06A		Apt Elev	876

RNP APCH - GPS.


T A Rwy 6 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using CLE altimeter setting. When local altimeter setting not received, use CLE altimeter setting and increase LPV DA to 1233 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1433 feet and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3100 direct IFSEH and on track 130° to BRICC and hold.


D-ATIS	CLEVELAND APP CON	COUNTY TOWER★	GND CON
119.95	125.35 346.325	127.95 (CTAF) L	121.85

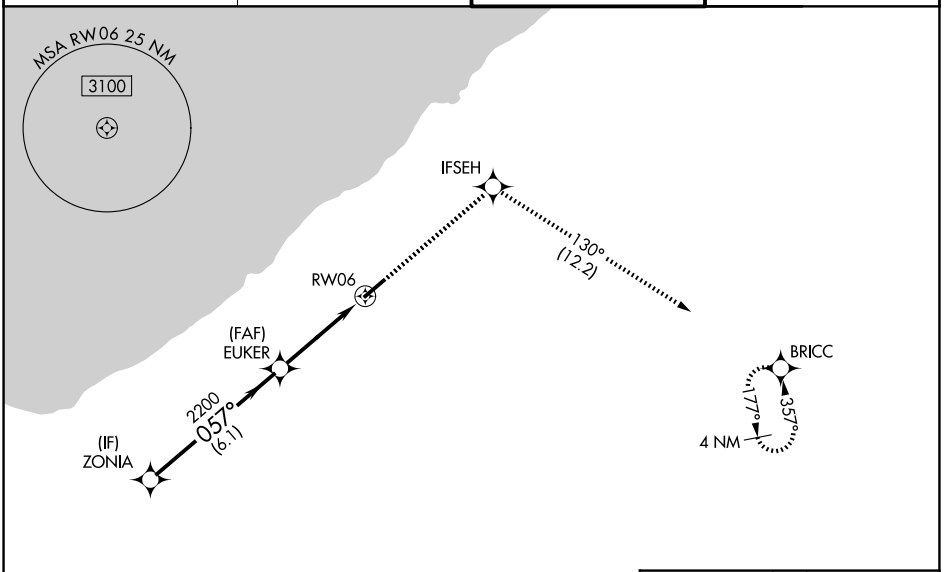

ELEV 876 D TDZE 874

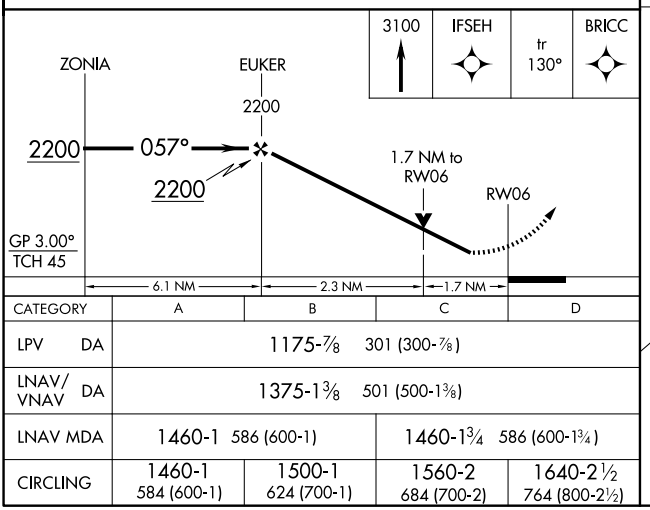

CATEGORY	A	B	C	D
LPV DA	1175-⅞ 301 (300-⅞)			
LNAV/VNAV DA	1375-1⅜ 501 (500-1⅜)			
LNAV MDA	1460-1 586 (600-1)		1460-1¾ 586 (600-1¾)	
CIRCLING	1460-1 584 (600-1)	1500-1 624 (700-1)	1560-2 684 (700-2)	1640-2½ 764 (800-2½)



REIL Rwy 6 L
HIRL Rwy 6-24 L

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026