RNAV (GPS) Y RWY 36

CORPUS CHRISTI INTL (CRP)

WAAS	APP CRS	Rwy Ldg	6080
CH 69617	355°	TDZE	40
W36A		Apt Elev	46

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat E visibility to RVR 6000.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2000 direct FEKEL and on track 304° to ATHIS and hold.

ATIS	CORPUS APP CON	CORPUS TOWER	GND CON
126.8	120.9 348.725	119.4 257.8	121.9 269.15

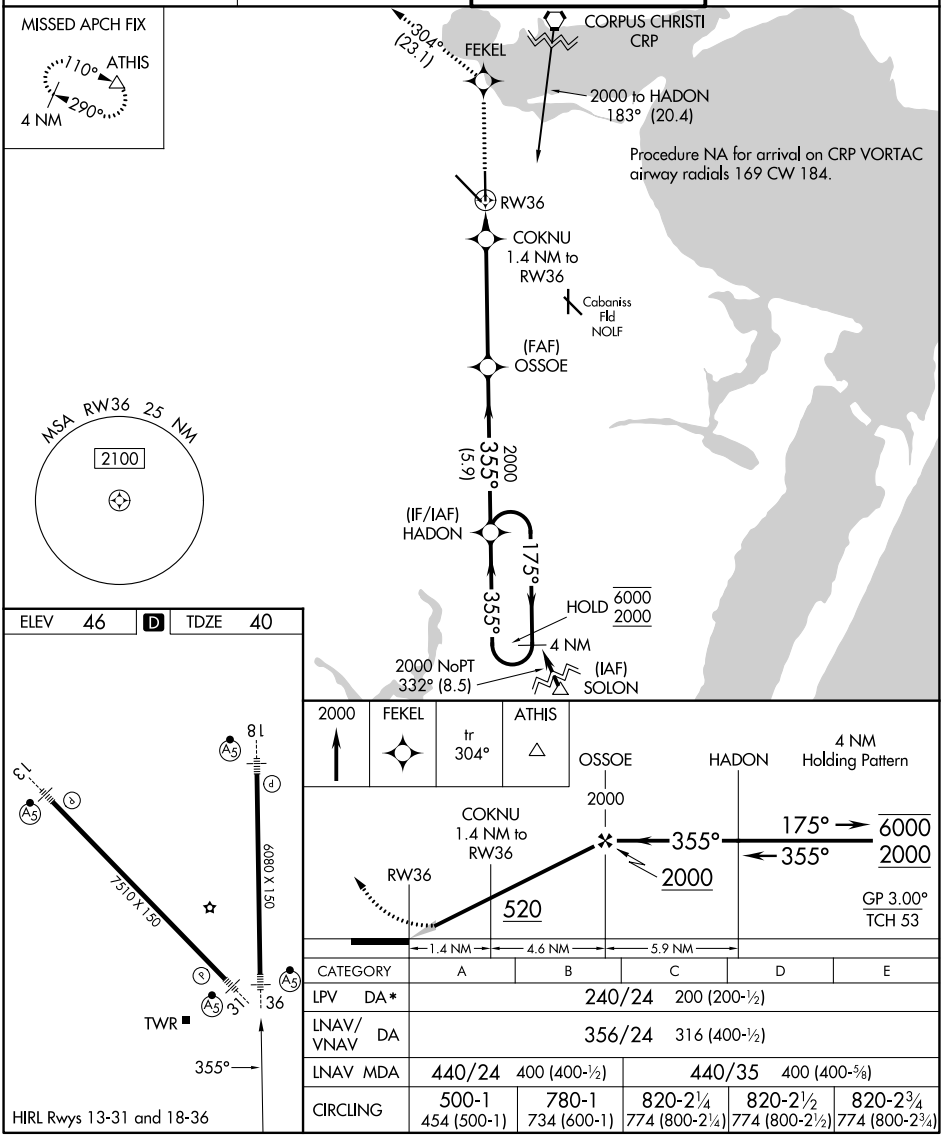

CATEGORY	A	B	C	D	E
LPV DA*	240/24 200 (200-½)				
LNAV/VNAV DA	356/24 316 (400-½)				
LNAV MDA	440/24 400 (400-½)		440/35 400 (400-⅝)		
CIRCLING	500-1 454 (500-1)	780-1 734 (600-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026