WAAS	APP CRS	Rwy Ldg	7000
CH 99341	214°	TDZE	7003
W21A		Apt Elev	7014

RNAV (GPS) RWY 21


FLAGSTAFF PULLIAM (FLG)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19 °C (2°F) or above 44°C (111°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to ⅞ SM.


MALSR


MISSED APPROACH: Climb to 7500 then climbing left turn to 10800 direct HOXOL and hold.

ATIS	PHOENIX APP CON	FLAGSTAFF TOWER ★	GND CON	UNICOM
125.8	126.375 236.775	134.55 (CTAF) L 239.25	121.9	122.95

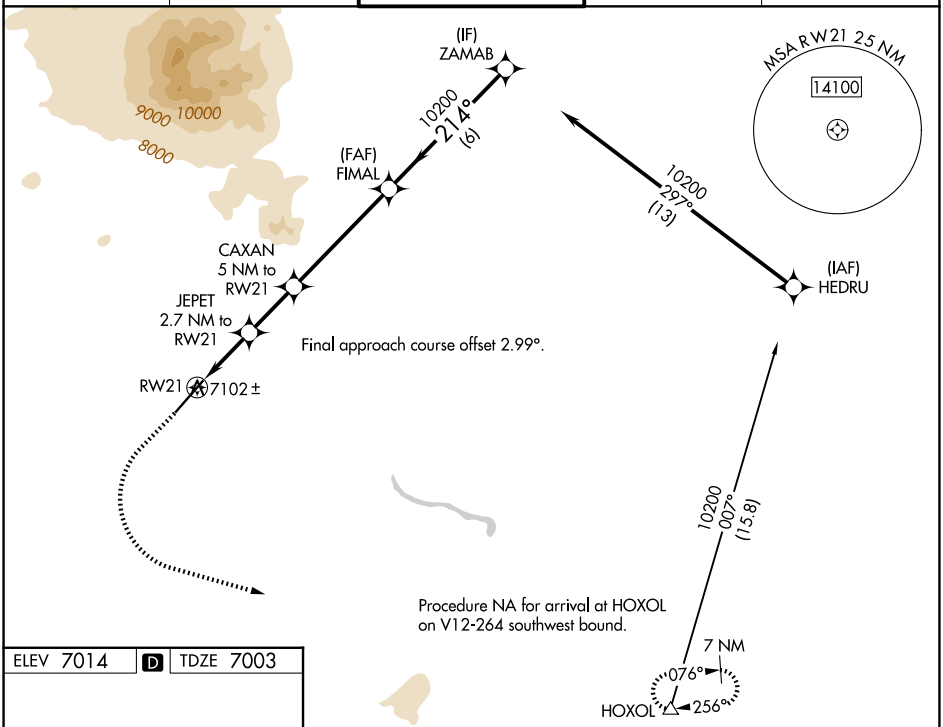

ELEV 7014 D TDZE 7003



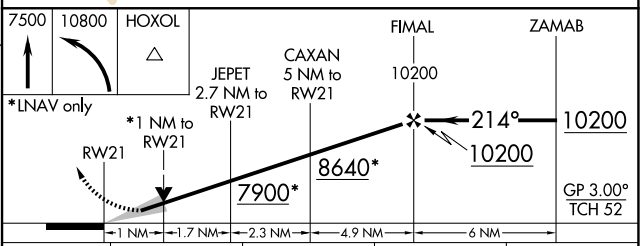

CATEGORY	A	B	C	D
LPV DA	7258-½ 255 (300-½)			
LNAV/VNAV DA	7319-⅝ 316 (400-⅝)			
LNAV MDA	7360-½ 357 (400-½)		7360-⅝ 357 (400-⅝)	
CIRCLING	7520-1 506 (600-1)	7560-1 546 (600-1)	8100-3 1086 (1100-3)	8560-3 1546 (1600-3)

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026