RNAV (GPS) RWY 14

BOIRE FLD (ASH)

WAAS	APP CRS	Rwy Ldg	5650
CH 97730	139°	TDZE	200
W14A		Apt Elev	200


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅛ SM and LNAV Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 2000 direct PELAN and hold.

ATIS	BOSTON APP CON	NASHUA TOWER	GND CON
125.1	124.9 269.075	133.2 (CTAF) L	121.8

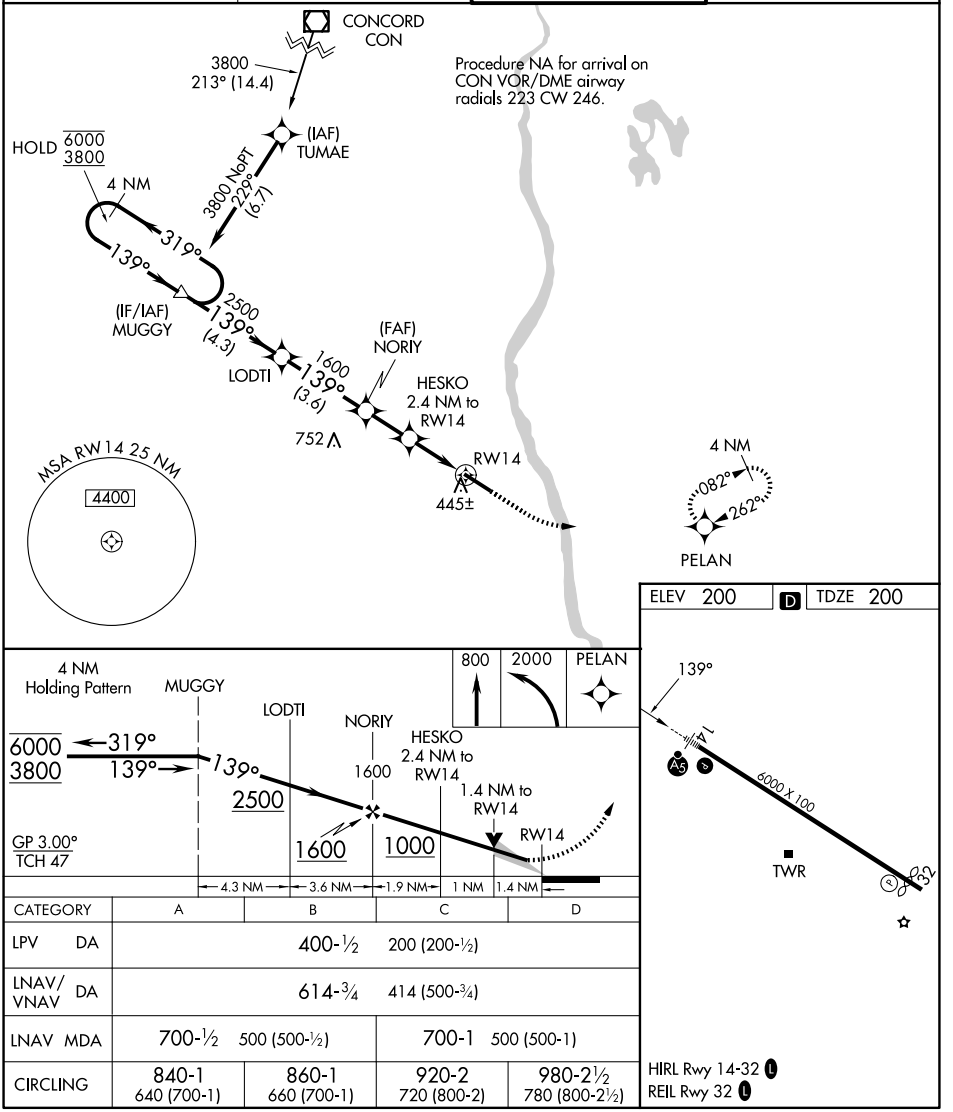

CATEGORY	A	B	C	D
LPV DA	400-½		200 (200-½)	
LNAV/VNAV DA	614-¾		414 (500-¾)	
LNAV MDA	700-½	500 (500-½)	700-1	500 (500-1)
CIRCLING	840-1 640 (700-1)	860-1 660 (700-1)	920-2 720 (800-2)	980-2½ 780 (800-2½)

NE-1, 29 OCT 2026 to 26 NOV 2026
NE-1, 29 OCT 2026 to 26 NOV 2026