WAAS	APP CRS	Rwy Ldg	6143
CH **99413**	**179°**	TDZE	8
W18A		Apt Elev	9

RNAV (GPS) RWY 18

HOUMA-TERREBONNE (HUM)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using MSY altimeter setting. When local altimeter setting not received, use MSY altimeter setting and increase LPV DA to 286 feet; increase LNAV/VNAV DA to 517 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MALSR


MISSED APPROACH: Climb to 1900 direct ITIWE and hold.

ATIS	NEW ORLEANS APP CON	HOUMA TOWER ★	GND CON	UNICOM
120.25	**118.9 350.35**	**125.3** (CTAF) **L 346.3**	**123.875**	**122.95**

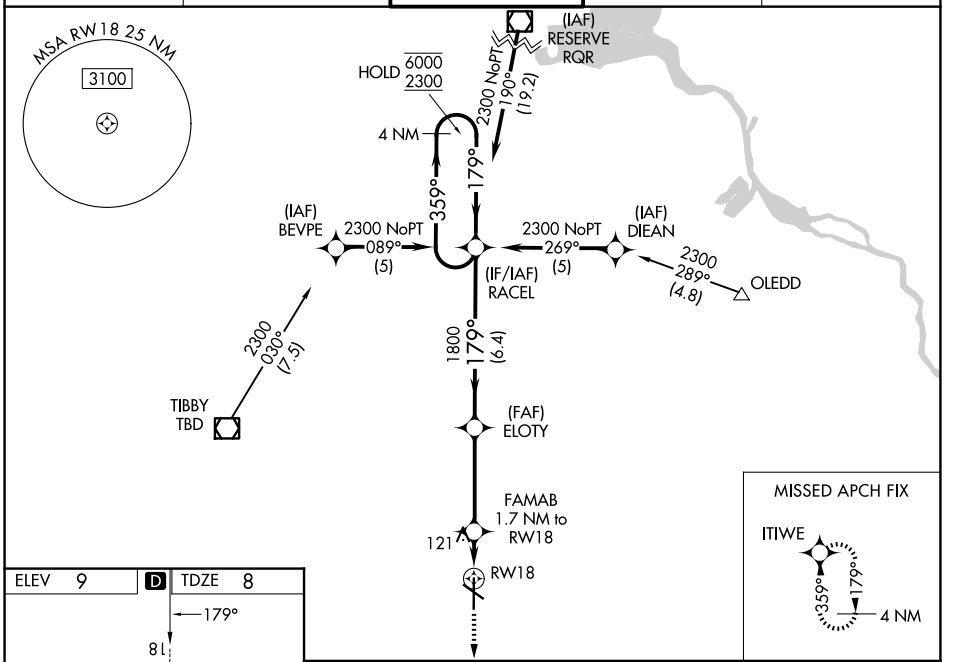

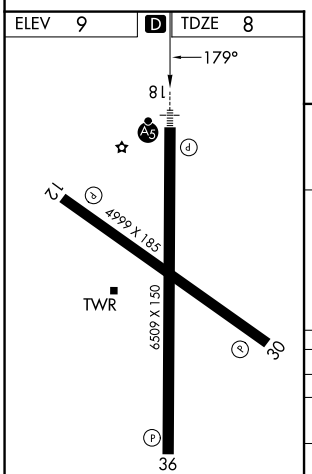

REIL Rwys 12, 30 and 36 **L**
MIRL Rwys 12-30 and 18-36 **L**

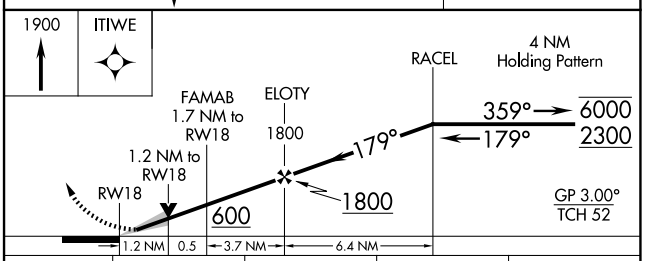

CATEGORY	A	B	C	D
LPV DA	209-½ 201 (200-½)			
LNAV/VNAV DA	440-½ 432 (500-½)		440-¾ 432 (500-¾)	
LNAV MDA	440-½ 432 (500-½)		440-¾ 432 (500-¾)	
CIRCLING	480-1 471 (500-1)		760-2¼ 751 (800-2¼)	760-2½ 751 (800-2½)

SC-4, 29 OCT 2026 to 26 NOV 2026

SC-4, 29 OCT 2026 to 26 NOV 2026