RNAV (GPS) RWY 36

TALLAHASSEE INTL (TLH)

WAAS CH 60900 W36A	APP CRS 004°	Rwy Ldg 7000 TDZE 62 Apt Elev 83


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.
* RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 3000 direct CIGAY and hold, continue climb-in-hold to 3000.


ATIS	TALLAHASSEE APP CON *	TALLAHASSEE TOWER *	GND CON	UNICOM
119.45 239.25	135.8 317.4	118.7 (CTAF) L 257.8	121.9 348.6	123.075

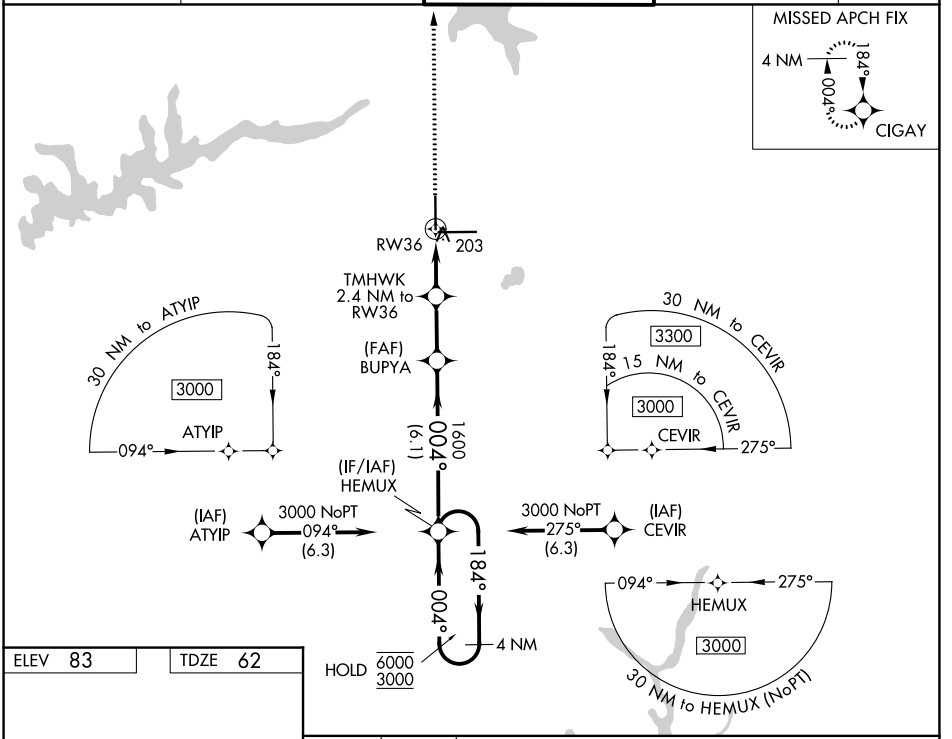

ELEV 83 TDZ 62

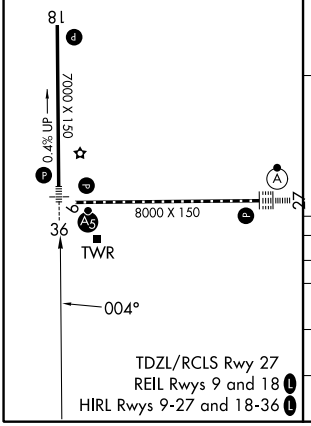

TDZL/RCLS Rwy 27
REIL Rwys 9 and 18 L
HIRL Rwys 9-27 and 18-36 L

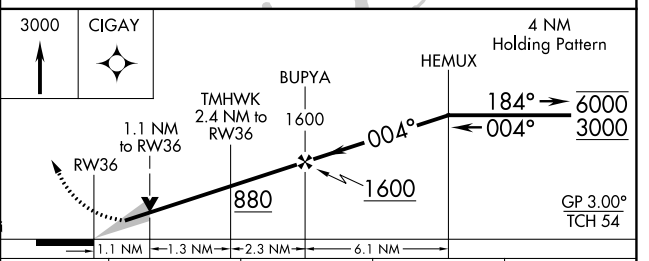

CATEGORY	A	B	C	D
LPV DA *	262/24 200 (200-½)			
LNAV/VNAV DA	364/24 302 (300-½)			
LNAV MDA	460/24 398 (400-½)		460/35 398 (400-⅝)	
CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026