VOR or TACAN RWY 36

TALLAHASSEE INTL (TLH)

VORTAC SZW	APP CRS	Rwy Ldg	7000
117.5	353°	TDZE	62
Chan 122		Apt Elev	83

DME required.

For inop ALS, increase VOR Cat E visibility to RVR 6000.
For inop ALS, increase TACAN Cat E visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 4000 direct SZW VORTAC and on SZW VORTAC R-288 to QUILL/SZW 11.8 DME and hold, continue climb-in-hold to 4000.

ATIS	TALLAHASSEE APP CON ★	TALLAHASSEE TOWER ★	GND CON	UNICOM
119.45 239.25	135.8 317.4	118.7 (CTAF) L 257.8	121.9 348.6	123.075

MISSED APCH FIX

QUILL
SZW 11.8

108°
288°
117.5 SZW
R-288
Chan 122

R-288

SEMINOLE
117.5 SZW
Chan 122

3000 to HAKUT
173° (21)

209°±

XBEGN
SZW 11.8

DACAR
SZW 14.5

1600
(6.5)
353°

(IF/IAF)
HAKUT
SZW 21

173°
1 min
353°


SZW
R-173


HOLD 6000 3000

MSA SZW 25 NM
3300

ELEV 83 TDZE 62

TDZL/RCLS Rwy 27
REIL Rwys 9 and 18 L
HIRL Rwys 9-27 and 18-36 L

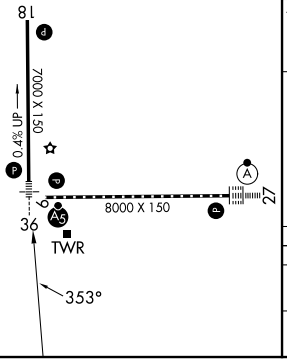

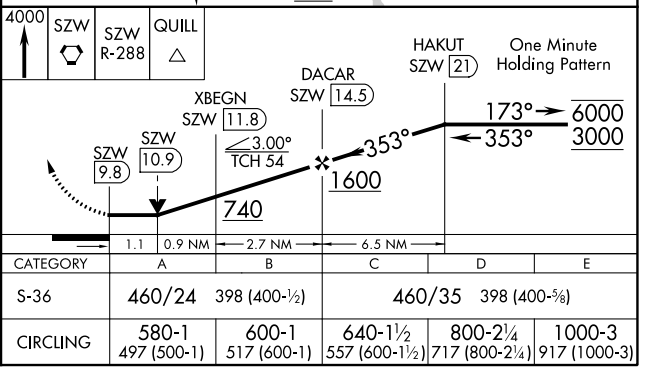

CATEGORY	A	B	C	D	E
S-36	460/24	398 (400-½)	460/35	398 (400-⅝)	
CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)	1000-3 917 (1000-3)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026