ILS or LOC RWY 2

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

LOC/DME I-TXN	APP CRS	Rwy Ldg	8000
111.55	021°	TDZE	867
Chan 52 (Y)		Apt Elev	871


DME required for LOC only.

T A Autopilot coupled approach NA below 1100. VDP NA when using PIA altimeter setting. Inop table does not apply to S-ILS 2. For inop ALS, increase S-LOC 2 Cats C and D visibility to RVR 6000. When local altimeter setting not received, use PIA altimeter setting: increase S-ILS 2 DA to 1183 feet; increase all MDAs 120 feet and Circling visibility Cats C and D ¼ SM. For inop ALS when using PIA altimeter setting, increase S-LOC 2 Cats C and D visibility to 1 ⅜ SM.

MALSR A5

MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 on heading 270° and SPI VORTAC R-037 to MCLEN INT/SPI 42 DME and hold.

ATIS	SAINT LOUIS APP CON	BLOOMINGTON TOWER ★	GND CON	UNICOM
119.575	128.725 256.9	124.6 (CTAF) L 269.575	121.65	122.95

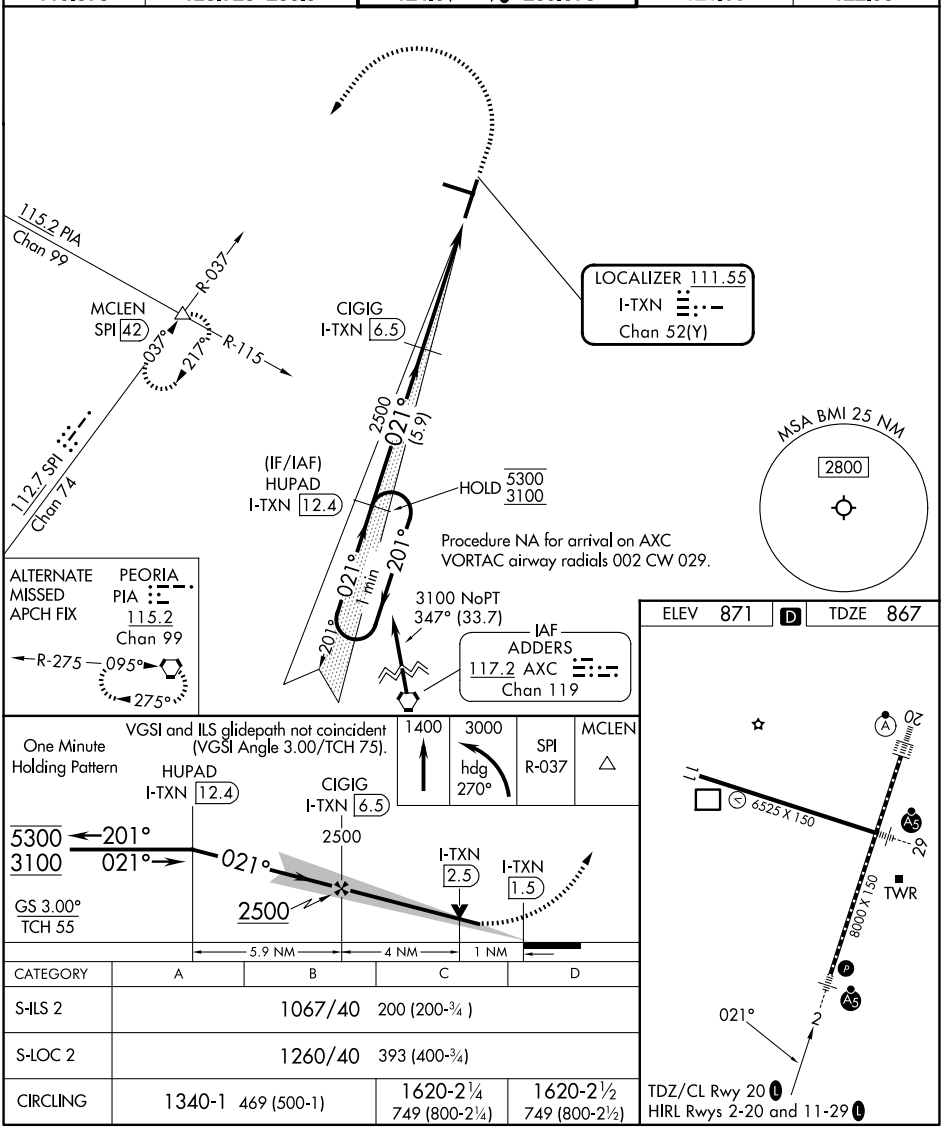

CATEGORY	A	B	C	D
S-ILS 2	1067/40	200 (200-¾)		
S-LOC 2	1260/40	393 (400-¾)		
CIRCLING	1340-1	469 (500-1)	1620-2¼ 749 (800-2¼)	1620-2½ 749 (800-2½)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026