# ILS or LOC RWY 20

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

| LOC/DME I-LHJ | APP CRS | Rwy Ldg | 8000 |
|---|---|---|---|
| 111.55 | 201° | TDZE | 871 |
| Chan 52(Y) | | Apt Elev | 871 |

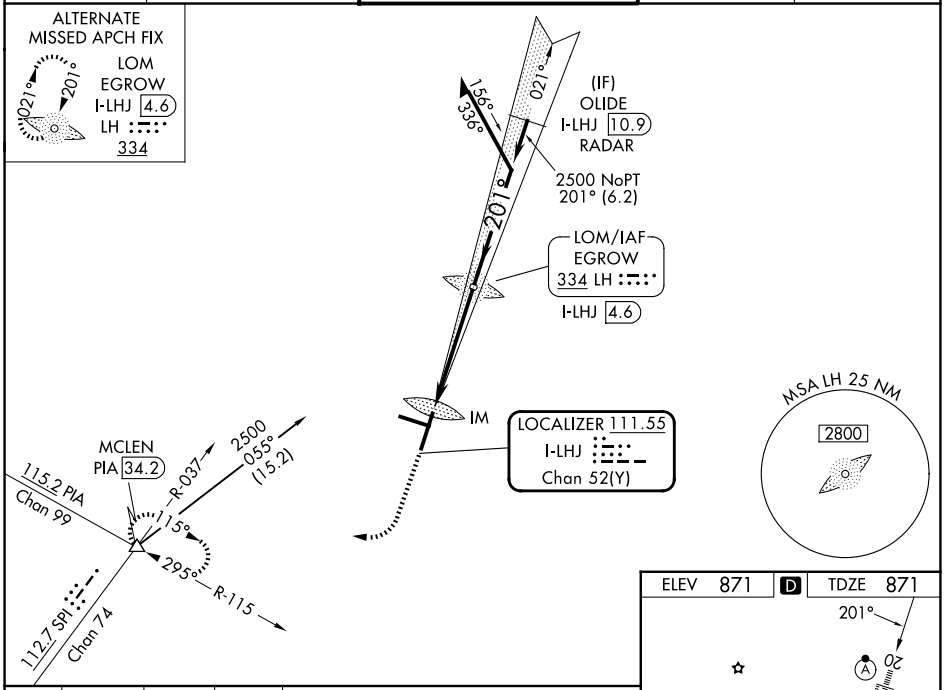
ADF or DME or RADAR required for LOC only.
RADAR required for procedure entry at OLIDE.

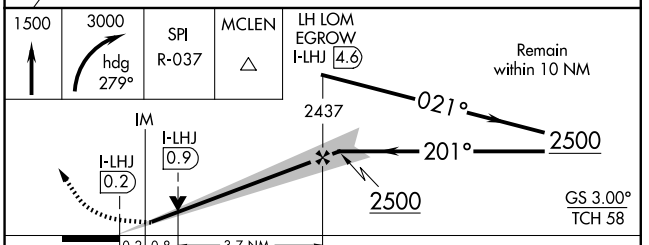
T A VDP NA when using PIA altimeter setting. When local altimeter setting not received, use PIA altimeter setting: increase S-ILS 20 DA to 1187 feet and all visibilities to RVR 2400; increase all MDAs 120 feet and S-LOC 20 visibility Cats C and D to RVR 5500 and Circling visibility Cats C and D ¼ SM. For inop ALS when using PIA altimeter setting, increase S-ILS 20 all Cats visibility to RVR 4500 and S-LOC 20 Cats C and D visibility to 1⅜ SM.

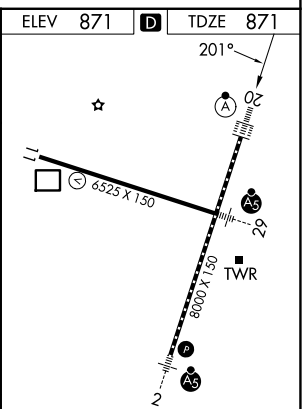
ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 279° and SPI VORTAC R-037 to MCLEN INT/PIA 34.2 DME and hold, continue climb-in-hold to 3000.

| ATIS | SAINT LOUIS APP CON | BLOOMINGTON TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 119.575 | 128.725 256.9 | 124.6 (CTAF) L 269.575 | 121.65 | 122.95 |




| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 20 | 1071/18 200 (200-½) | | | |
| S-LOC 20 | 1260/24 389 (400-½) | | 1260/35 389 (400-⅝) | |
| CIRCLING | 1340-1 469 (500-1) | | 1620-2¼ 749 (800-2¼) | 1620-2½ 749 (800-2½) |

TDZ/CL Rwy 20 L
HIRL Rwys 2-20 and 11-29 L

FAF to MAP 4.8 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 4:48 | 3:12 | 2:24 | 1:55 | 1:36 |



EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026